


## KVM 72-W48

Cable gland, brass according to DIN 89280



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

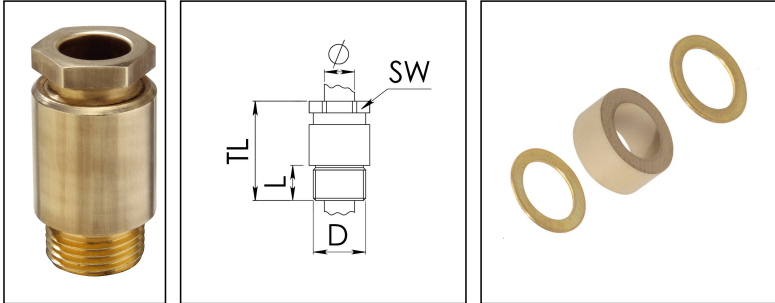

|                          |            |
|--------------------------|------------|
| Material cable gland     | Brass      |
| Material sealing gasket  | EPDM       |
| Temp. range min          | -40 °C     |
| Temp. range max          | 100 °C     |
| Protection class         | IP54       |
| Thread type              | M          |
| Ø Connection thread D    | 72         |
| Lead                     | 2          |
| Length screw-in thread L | 16 mm      |
| Ø cable diameter min     | 44 mm      |
| Ø cable diameter max     | 48,5 mm    |
| Key width SW             | 70 mm      |
| Collar diameter (E)      | 75 mm      |
| Total length TL          | 73 mm      |
| Install. torques fitting | 20 N/m     |
| Install. torques cap nut | 15 N/m     |
| Surface                  | Bright     |
| Order no. bright         | 10010885   |
| Type                     | KVM 72-W48 |
| Packing unit             | 1          |
| ETIM-Classification      | EC000441   |

### Recommended accessories

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

27.02.2021

Your Contact:

**WISKA UK Ltd.**

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

 +44-12-08816062 ·  +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

