

KVMP 24/13,5-Z14

Cable gland, brass according to DIN 89280



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.



Material cable gland	Brass
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	PG
Ø Connection thread D	13,5
Length screw-in thread L	9 mm
Ø cable diameter min	12 mm
Ø cable diameter max	14,5 mm
Key width SW	24 mm
Collar diameter (E)	27 mm
Total length TL	47 mm
Install. torques fitting	10 N/m
Install. torques cap nut	10 N/m
Surface	Bright
Order no. bright	10010939
Type	KVMP 24/13,5-Z14
Packing unit	1

22.10.2020


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

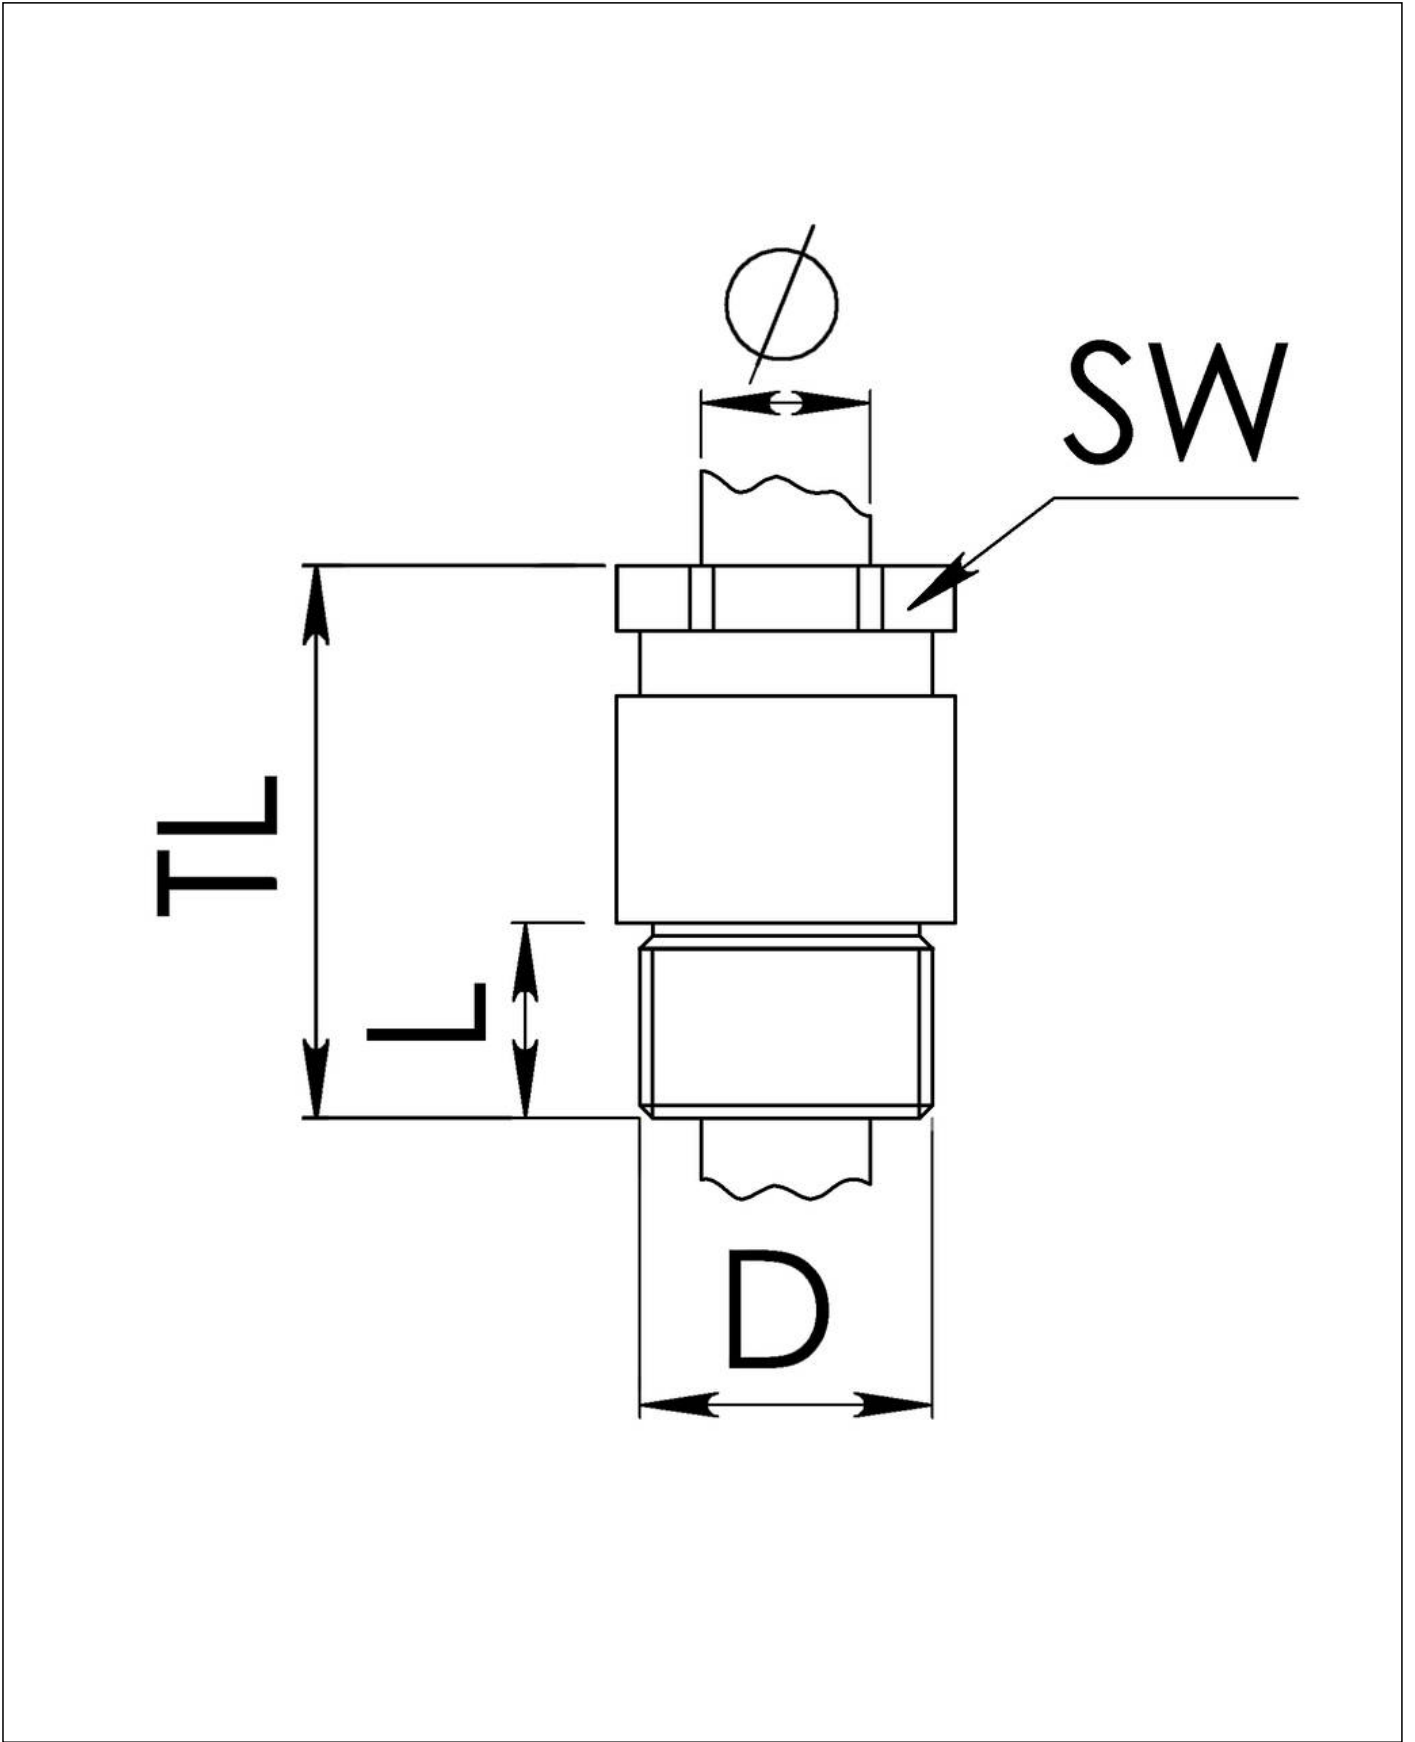

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk