


KVMP 24/16-W10a

Cable gland, brass according to DIN 89280



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

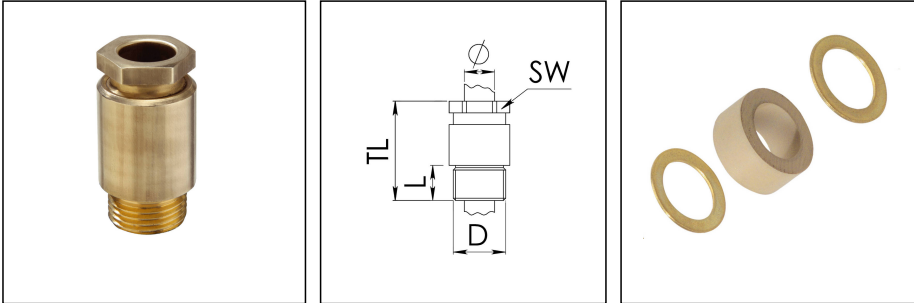

Material cable gland	Brass
Material sealing gasket	EPDM
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	PG
Ø Connection thread D	16
Length screw-in thread L	9 mm
Ø cable diameter min	8 mm
Ø cable diameter max	10,5 mm
Key width SW	24 mm
Collar diameter (E)	27 mm
Total length TL	47 mm
Install. torques fitting	10 N/m
Install. torques cap nut	10 N/m
Surface	Bright
Order no. bright	10011052
Type	KVMP 24/16-W10a
Packing unit	1

30.11.2020


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

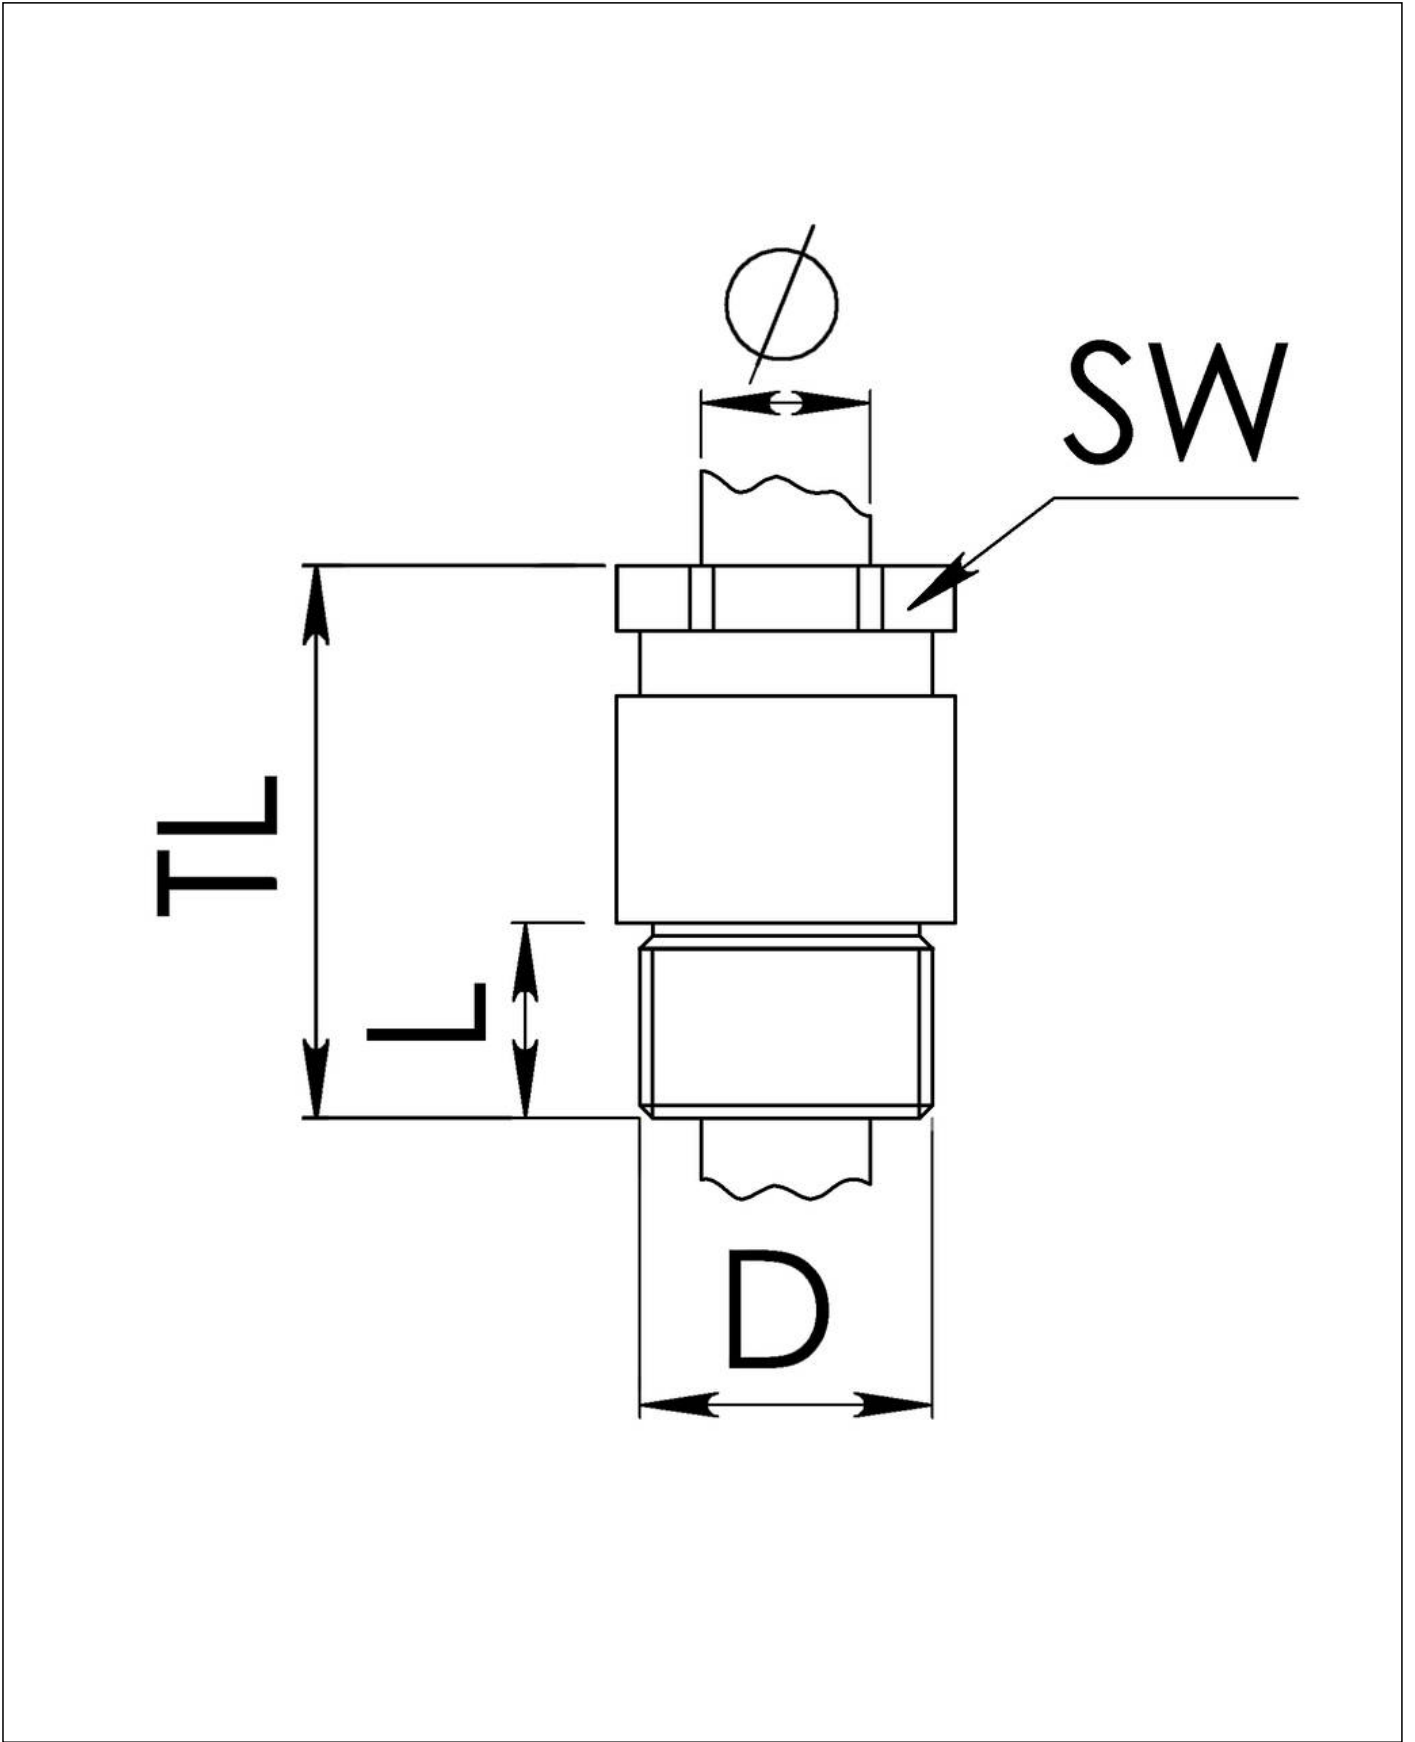

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 📠 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice