


KVMP 24/16-Z17/Ni

Cable gland, brass according to DIN 89280



Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

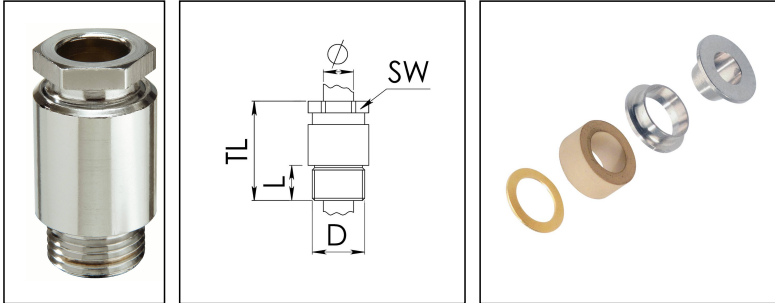

Material cable gland	Brass nickel-plated
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	PG
Ø Connection thread D	16
Length screw-in thread L	9 mm
Ø cable diameter min	16 mm
Ø cable diameter max	17,5 mm
Key width SW	24 mm
Collar diameter (E)	27 mm
Total length TL	47 mm
Install. torques fitting	10 N/m
Install. torques cap nut	10 N/m
Surface	Nickel-plated
Order no. nickel-plated	10012685
Type	KVMP 24/16-Z17/Ni
Packing unit	1

22.10.2020

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk



Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 📠 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice