
KVMP 36/29-Z22/Ni

Cable gland, brass according to DIN 89280







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.


RoHS

Material cable gland	Brass nickel-plated
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	PG
Ø Connection thread D	29
Length screw-in thread L	11 mm
Ø cable diameter min	20 mm
Ø cable diameter max	22,5 mm
Key width SW	36 mm
Collar diameter (E)	40 mm
Total length TL	56 mm
Install. torques fitting	15 N/m
Install. torques cap nut	15 N/m
Surface	Nickel-plated
Order no. nickel-plated	10016193
Type	KVMP 36/29-Z22/Ni
Packing unit	1
Tariff number	85369010
EAN number	4007685161930

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

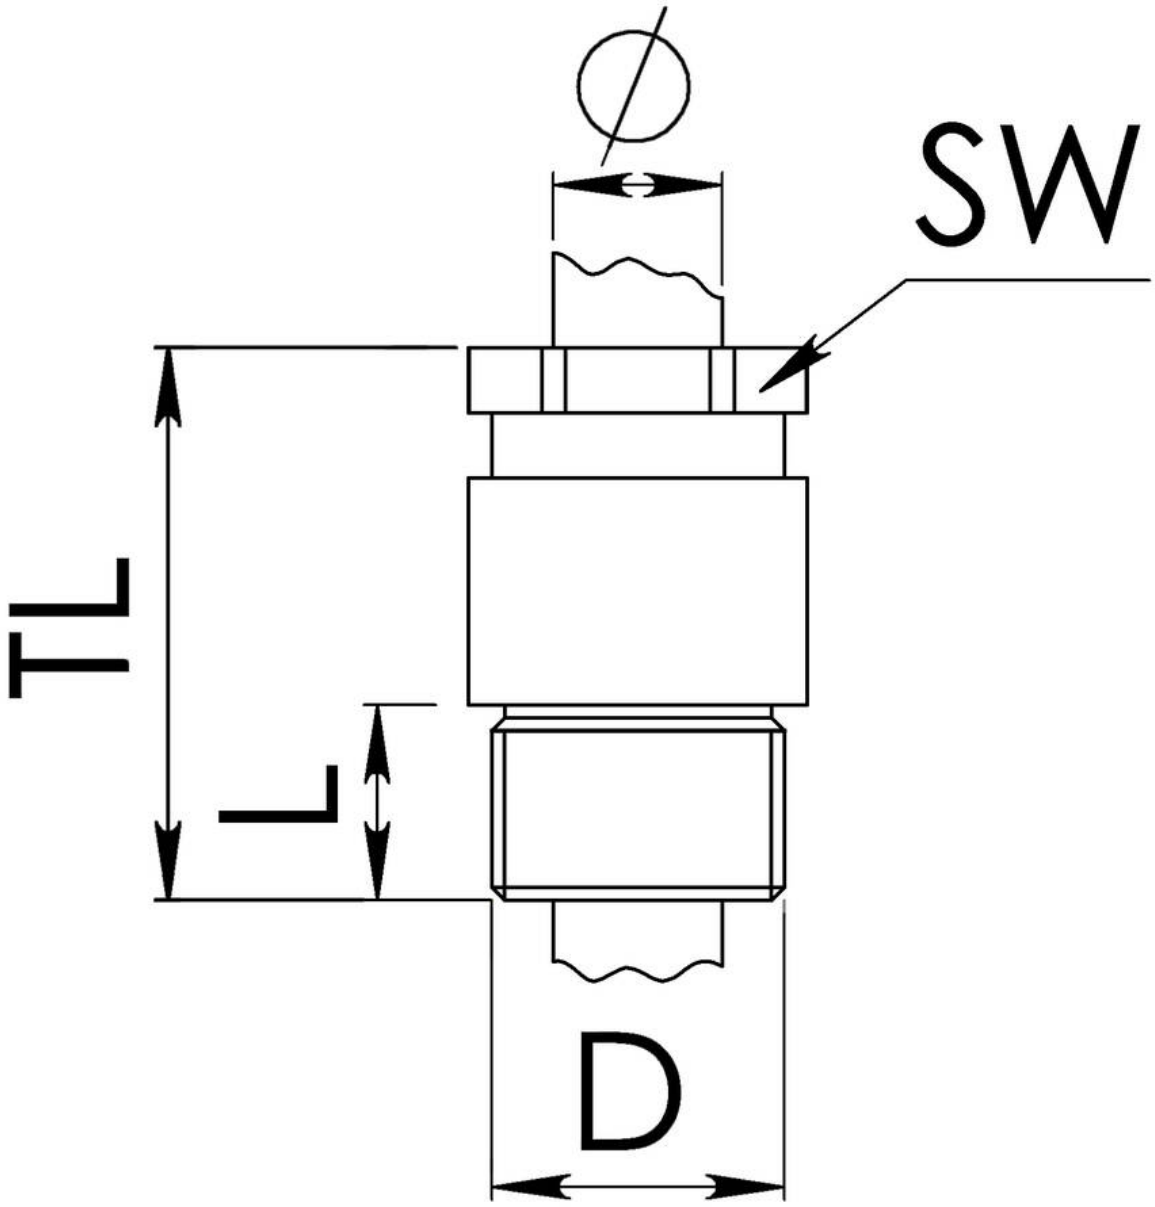

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice