
KVMS 45-Z32/Cr

Cable gland, brass according to DIN 89280







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material cable gland	Brass chromium-plated
Material sealing gasket	EPDM
Material earthing insert	Brass chromium-plated
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP54
Thread type	M
Ø Connection thread D	45
Lead	2
Length screw-in thread L	14 mm
Ø cable diameter min	30 mm
Ø cable diameter max	32,5 mm
Key width SW1	46 mm
Key width SW2	51 mm
Collar diameter E1	50 mm
Collar diameter E2	56 mm
Total length TL	62 mm
Install. torques fitting	20 N/m
Install. torques cap nut	15 N/m
Surface	Chromium-plated
Order no. chrome-plated	10016935
Type	KVMS 45-Z32/Cr
Packing unit	1
Tariff number	85369010
EAN number	4007685169356

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

ETIM-Classification	EC000441


Recommended accessories

GM 45/Cr	10011529

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

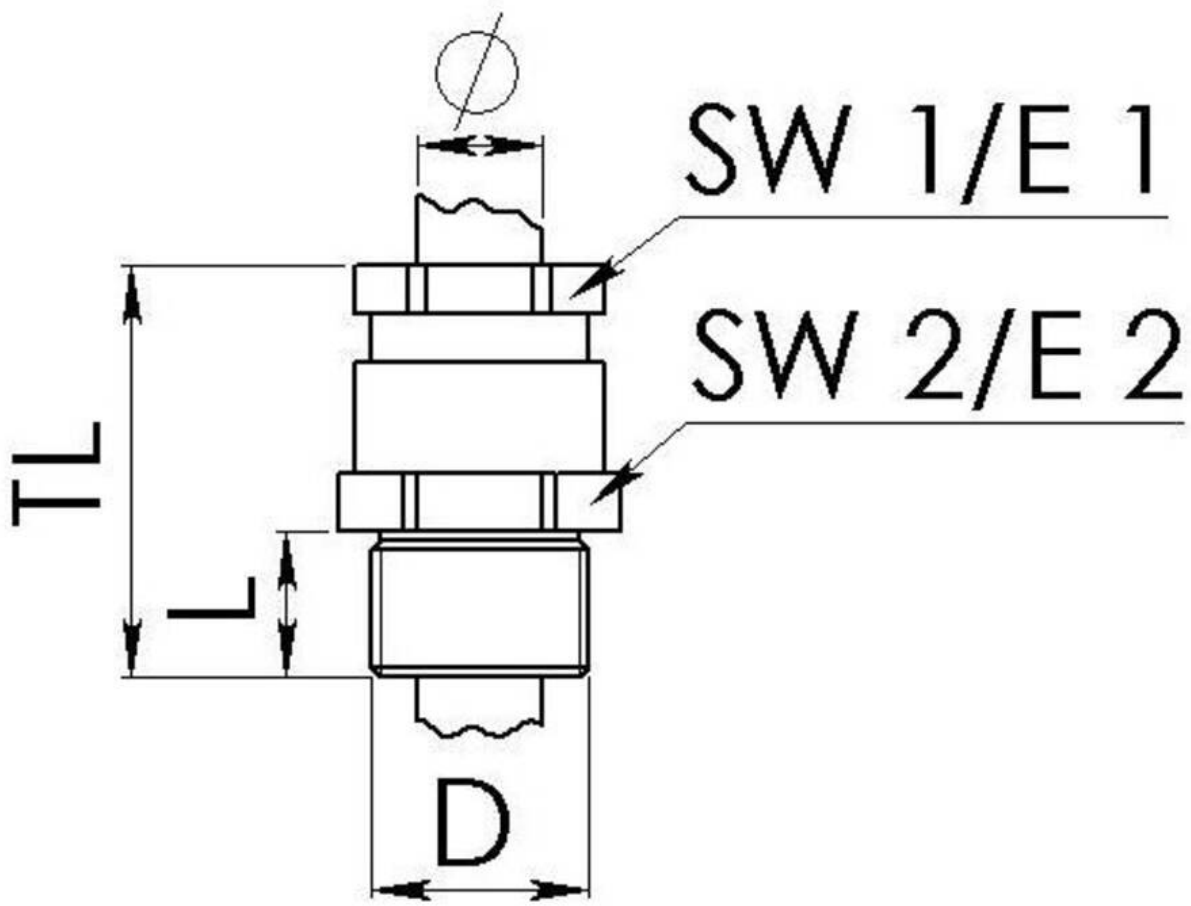

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice