
VSG 16 LG

Stop end, polyamide





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP56
Advice	with sealing IP66/IP68
Thread type	PG
Ø Connection thread D	16
Length screw-in thread L	6 mm
External diameter ED	27 mm
Total length TL	9,5 mm
Product Color	RAL 7035
Order no. RAL 7035	10060732
Type	VSG 16 LG
Packing unit	100
EAN number	4007685607322
Tariff number	39269097
ETIM-Classification	EC000032


Recommended accessories

MUG 16 LG	10060674
ADR 16	10061423

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

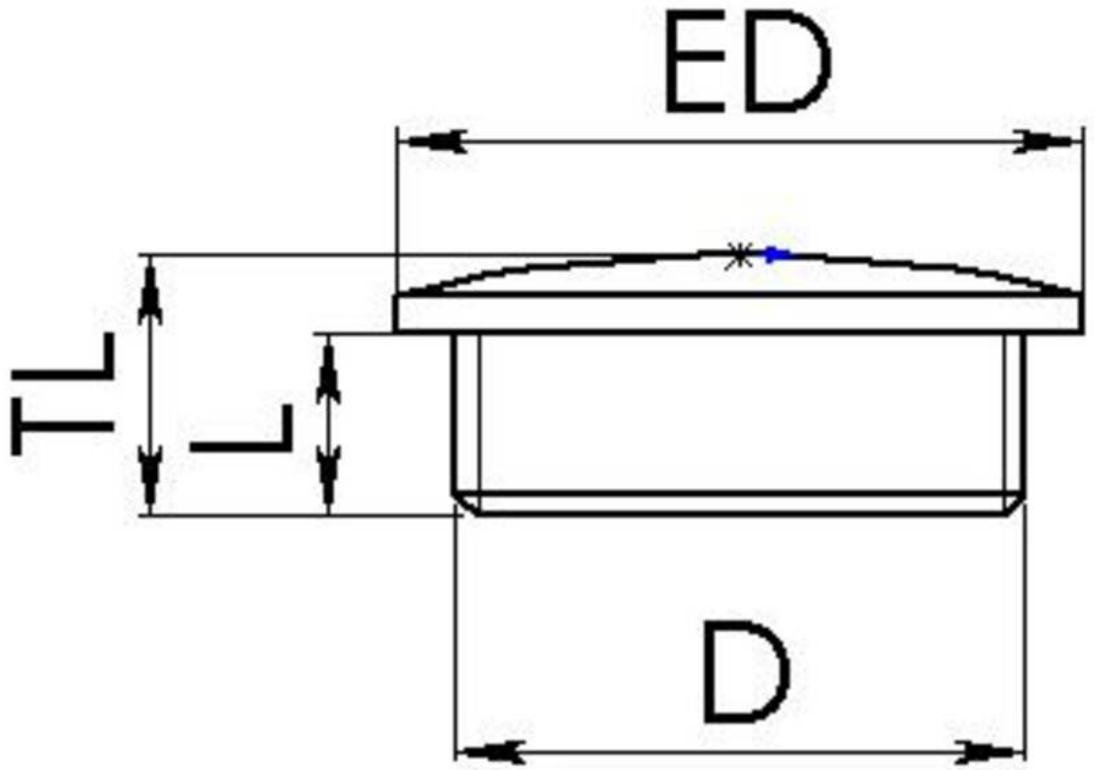

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice