
EMUF 16 BK

Locknut flame-retardant, polyamide





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.


SPRINT HL3 EN 45545 RoHS

Material	Polyamide UL94-V0
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	960 °C
Hazard level EN acc. 45545	R22=HL3 / R23=HL3 / R24=HL3
Thread type	M
Ø Connection thread D	16
Lead	1,5
Total length TL	5 mm
Key width SW	22 mm
Collar diameter (E)	24 mm
Product Color	RAL 9005
Order no. RAL 9005	10061771
Type	EMUF 16 BK
Packing unit	100
EAN number	4007685617710
Tariff number	39269097
ETIM-Classification	EC000940

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

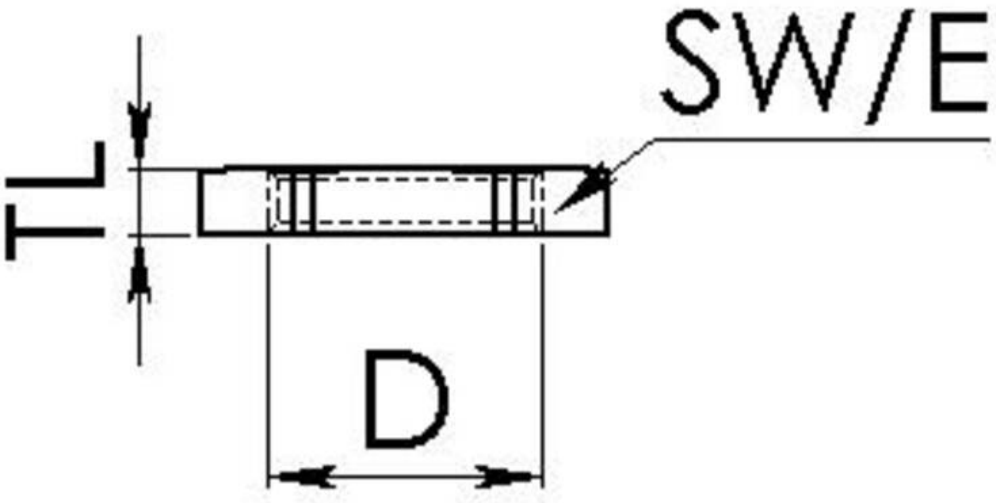

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice