
# EMUF 20 BK

Locknut flame-retardant, polyamide






Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

SPRINT HL3 EN 45545 RoHS


| | |
|---|---|
| **Material** | Polyamide UL94-V0 |
| **Temp. range min** | -40 °C |
| **Temp. range max** | 100 °C |
| **Glow wire test** | 960 °C |
| **Hazard level EN acc. 45545** | R22=HL3 / R23=HL3 / R24=HL3 |
| **Thread type** | M |
| **Ø Connection thread D** | 20 |
| **Lead** | 1,5 |
| **Total length TL** | 5 mm |
| **Key width SW** | 27 mm |
| **Collar diameter (E)** | 29 mm |
| **Product Color** | RAL 9005 |
| **Order no. RAL 9005** | 10061772 |
| **Type** | EMUF 20 BK |
| **Packing unit** | 100 |
| **EAN number** | 4007685617727 |
| **Tariff number** | 39269097 |
| **ETIM-Classification** | EC000940 |

06.11.2026

Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice

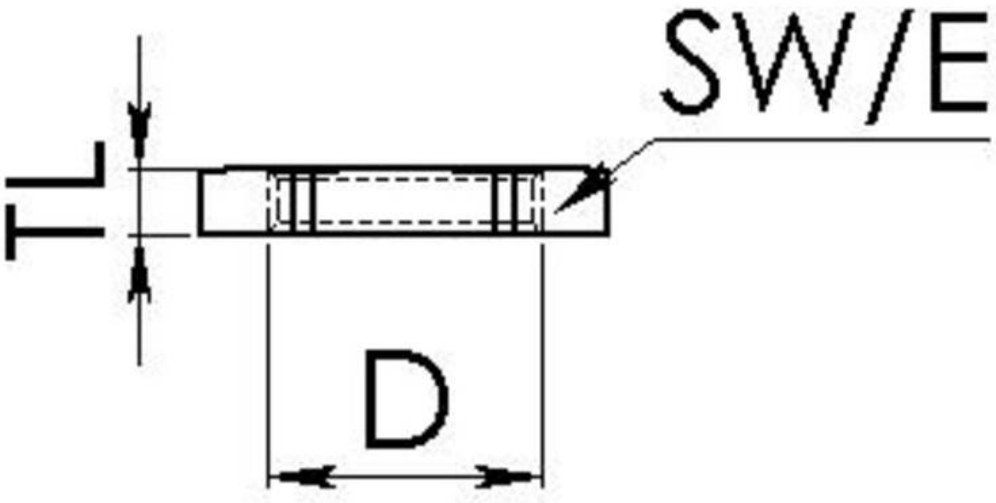


Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice