
EVS 25 LG

Stop end, polystyrol





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Polystyrene, impact resistant
Temp. range min	-20 °C
Temp. range max	60 °C
Protection class	IP56
Advice	with sealing IP66/IP68
Thread type	M
Ø Connection thread D	25
Lead	1,5
Length screw-in thread L	8 mm
Total length TL	11,5 mm
External diameter ED	30 mm
Product Color	RAL 7035
Order no. RAL 7035	10062493
Type	EVS 25 LG
Packing unit	100
EAN number	4007685624930
Tariff number	39269097
ETIM-Classification	EC000032


Recommended accessories

EMUG 25 LG	10060773
EADR 25	10062804

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

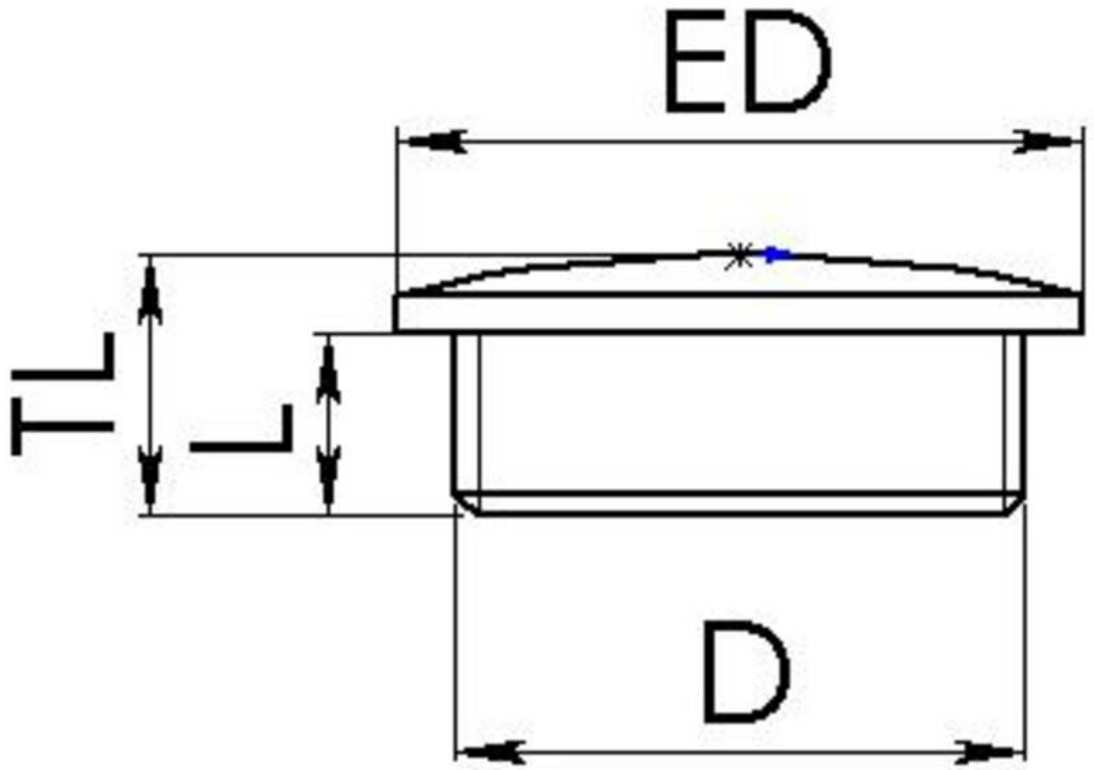

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice