
EMT-F 16 WH

Membrane spout, flame retardant





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.


RoHS

Material	TPE, flame-retardant
Temp. range min	-40 °C
Temp. range max	80 °C
Glow wire test	960 °C
Protection class	IP66
Ø Connection thread D	16
Length screw-in thread L	9,5 mm
Ø cable diameter min	1 mm
Ø cable diameter max	9 mm
External diameter ED	21 mm
Total length TL	11 mm
Ø Drilling	16 mm - 17,2 mm
Wall thickness S	2 mm
Product Color	white
Order no. RAL 9001	10063008
Type	EMT-F 16 WH
Packing unit	100
EAN number	4007685630085
Tariff number	39269097
ETIM-Classification	EC000451

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

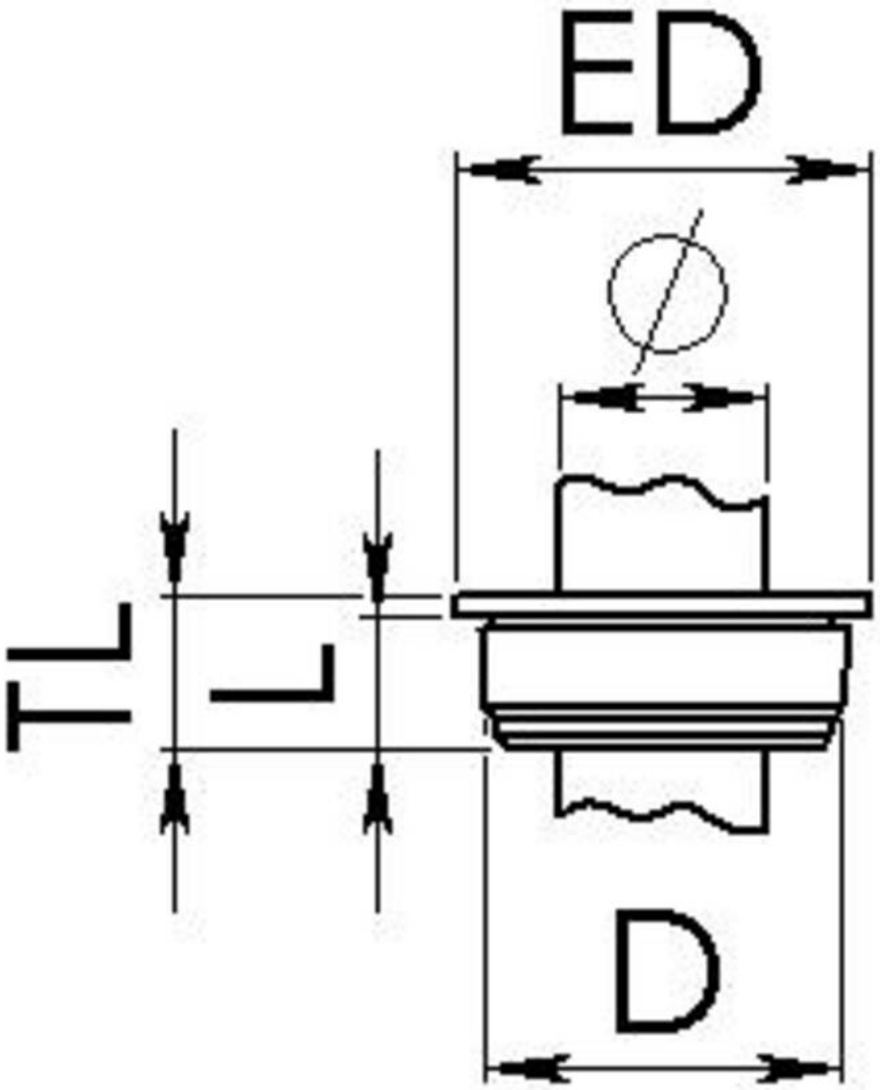

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice