
KRM 32/20 LG

Reduction adaptor, polyamide





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Thread type outer	M
Ø outer thread	32
Lead outer	1,5
Length screw-in thread L	12 mm
Thread type inner	M
Ø inner thread	20
Lead inner	1,5
Key width SW	36 mm
Collar diameter (E)	40 mm
Total length TL	19 mm
Product Color	RAL 7035
Order no. RAL 7035	10063584
Type	KRM 32/20 LG
Packing unit	50
EAN number	4007685635844
M_00000190	39269097
ETIM-Classification	EC000938

Recommended accessories

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk


Other technical data on request / subject to change without notice

EMUG 32 LG	10060774
EADR 32	10062805

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

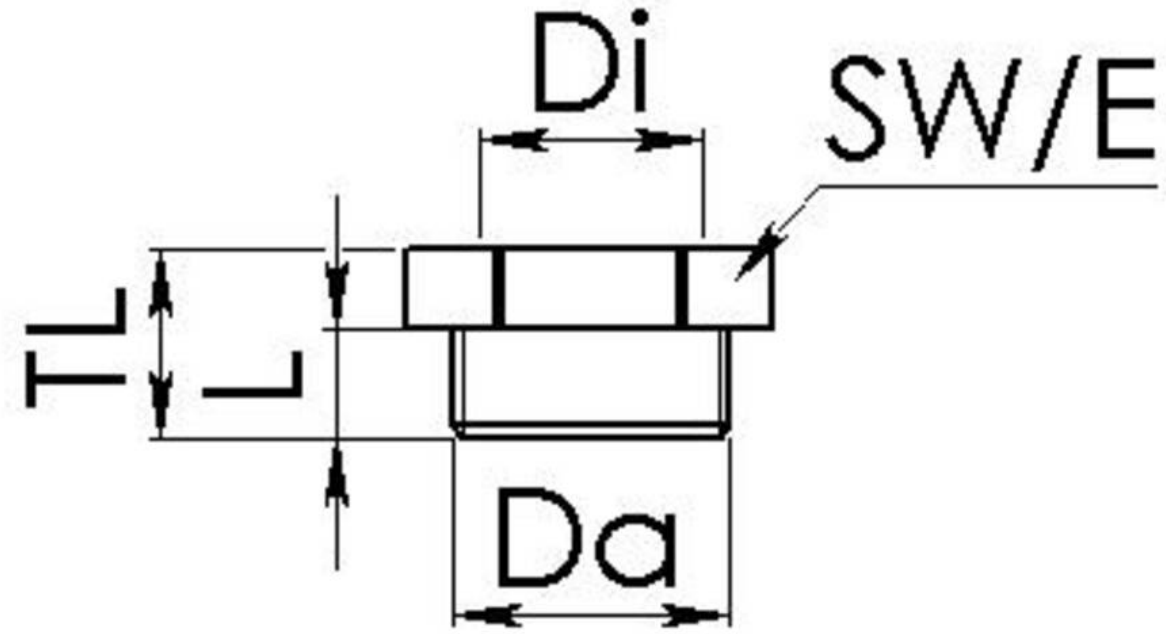

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice