
AMP 40/36 LG

Adaptor polyamide





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material	Polyamide, fibre reinforced
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	650 °C
Thread type outer	M
Ø outer thread	40
Lead outer	1,5
Length screw-in thread L	12 mm
Thread type inner	PG
Ø inner thread	36
Length internal thread	15,5 mm
Total length TL	30 mm
Key width SW	53 mm
Collar diameter (E)	59 mm
Form	A
Product Color	RAL 7035
Order no. RAL 7035	10063644
Type	AMP 40/36 LG
Packing unit	10
EAN number	4007685636445
Tariff number	39269097
ETIM-Classification	EC000938

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice


Recommended accessories

EMUG 40 LG	10060775
EADR 40	10062806

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

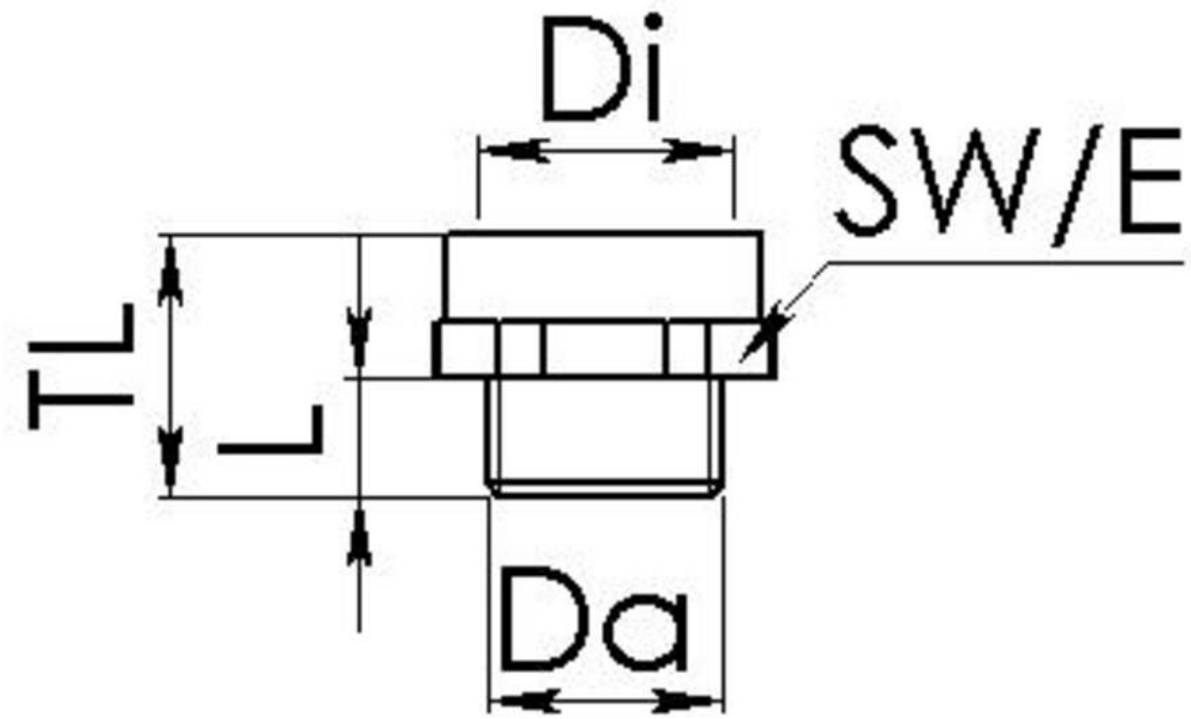

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice