
EVSF 12 LG

Stop end flame-retardant, polyamide





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

HL3 EN 45545 RoHS

Material	Polyamide UL94-V0
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	960 °C
Protection class	IP56
Hazard level EN acc. 45545	R22=HL3 / R23=HL3 / R24=HL3
Advice	with sealing IP66/IP68
Thread type	M
Ø Connection thread D	12
Lead	1,5
Length screw-in thread L	6 mm
Total length TL	8 mm
External diameter ED	15 mm
Product Color	RAL 7035
Order no. RAL 7035	10064666
Type	EVSF 12 LG
Packing unit	100
EAN number	4007685646666
Tariff number	39269097
ETIM-Classification	EC000032

Recommended accessories

EMUF 12 LG	10060810

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk


Other technical data on request / subject to change without notice

EADR 12 10062801

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

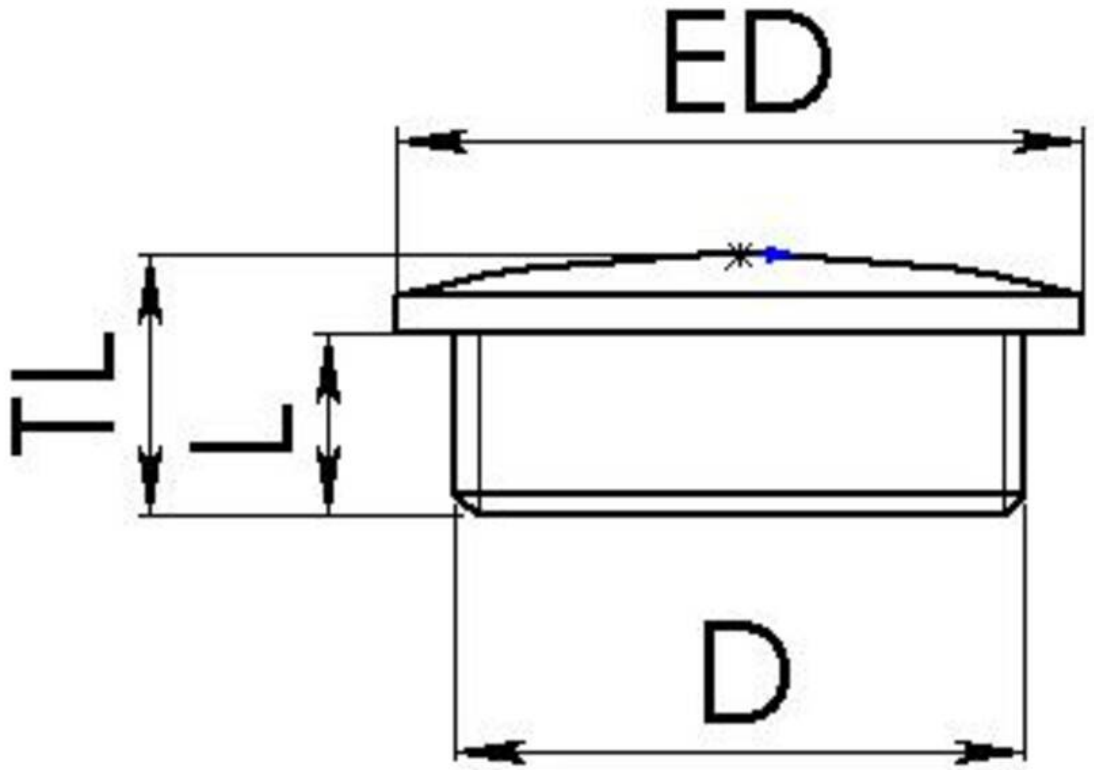

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice