
EVSF 25 LG

Stop end flame-retardant, polyamide





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

HL3 EN 45545 RoHS

Material	Polyamide UL94-V0
Temp. range min	-40 °C
Temp. range max	100 °C
Glow wire test	960 °C
Protection class	IP56
Hazard level EN acc. 45545	R22=HL3 / R23=HL3 / R24=HL3
Advice	with sealing IP66/IP68
Thread type	M
Ø Connection thread D	25
Lead	1,5
Length screw-in thread L	8 mm
Total length TL	11,5 mm
External diameter ED	30 mm
Product Color	RAL 7035
Order no. RAL 7035	10064669
Type	EVSF 25 LG
Packing unit	100
EAN number	4007685646697
Tariff number	39269097
ETIM-Classification	EC000032

Recommended accessories

EMUF 25 LG	10060813

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk


Other technical data on request / subject to change without notice

EADR 25 10062804

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

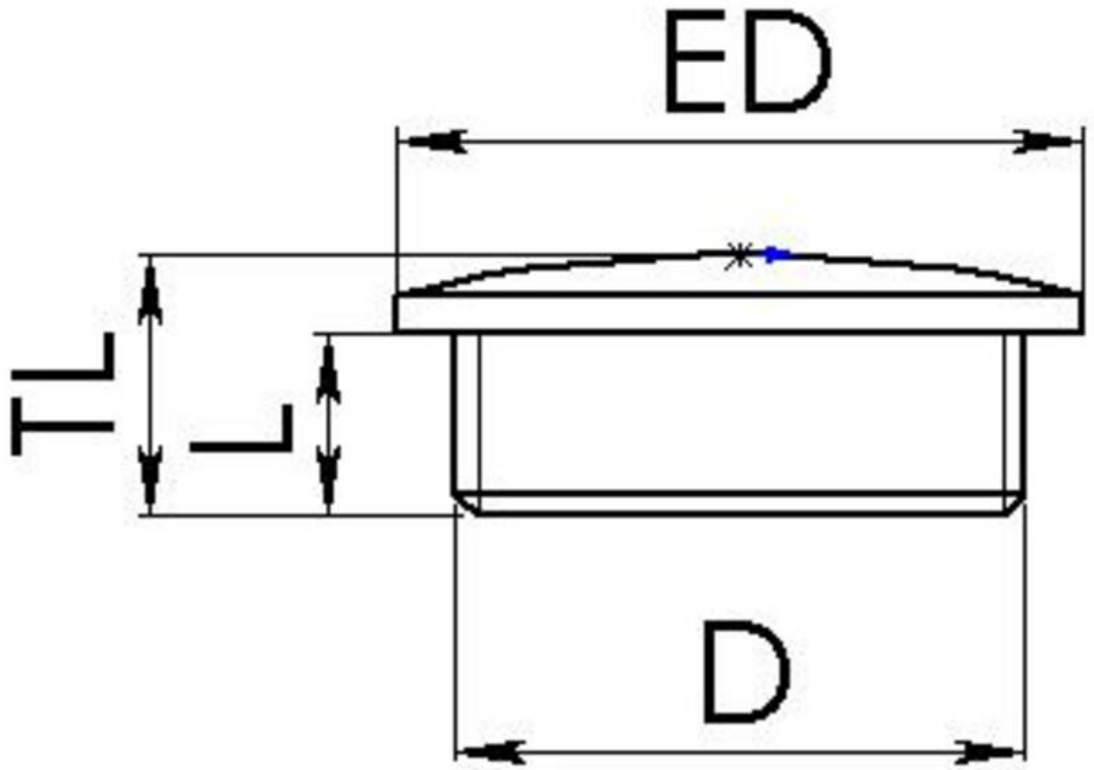

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice