
CKM 63 V0 LG

CONMAXX divided gland with locknut





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material cable gland	polyamide UL94-V0
Material sealing gasket	TPE UL94-V0
Protection class	IP66
Temp. range min	-40 °C
Temp. range max	100 °C
Thread type	M
Ø Connection thread D	63
Lead	1,5
Length screw-in thread L	15 mm
Key width SW	68 mm
Collar diameter (E)	72 mm
Total length TL	40 mm
Product Color	RAL 7035
Equipment	incl. locknut
Type	CKM 63 V0 LG
Order no. RAL 7035	10108668
Packing unit	1
EAN number	4007686067781
Tariff number	39269097
ETIM-Classification	EC000441

Remarks:

- inclusive divided locknut
- suitable sealing inserts: CDGG or 1x CGX + 4x CDKG
- if using the cross grid CGX, then are only the small sealing elements CDKG with clamping range max. 10mm suitable

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice


Recommended accessories

CGX V0 BK	10108190

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

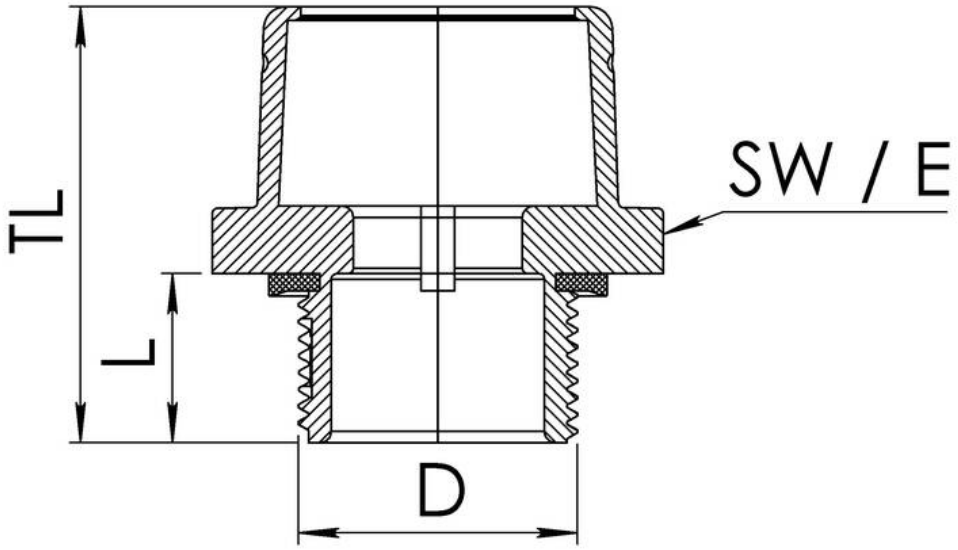

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice