
# SHARK 425/S

SHARK T Branch





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

| | |
|---|---|
| **Material** | Polyamide |
| **Filling** | Silicone |
| **Temp. range min** | -20 °C |
| **Temp. range max** | 90 °C |
| **Glow wire test** | self-extinguishing |
| **Voltage** | 0,6 kV - 1 kV |
| **Quantity of cable** | 1 |
| **Type** | SHARK 425/S |
| **UK-Number** | SH1425 |
| **WISKA-Order no.** | 10108950 |
| **Packing unit** | 1 |
| **ETIM-Classification** | EC001169 |

Remarks:

Cable Size: Main Cable up to 150 mm Branch cable up to 50 mm
LxBxH: 210x125x49 mm

Describtion:

SHARK T BRANCH Pre-filled gel insulated T joint for branch connection.

Additional Info:


Ready to use, re-enterable, no mixing or pouring, immediate operation, excellent electrical insulation, good mechanical strenght, no expiry date.

06.11.2026

Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice

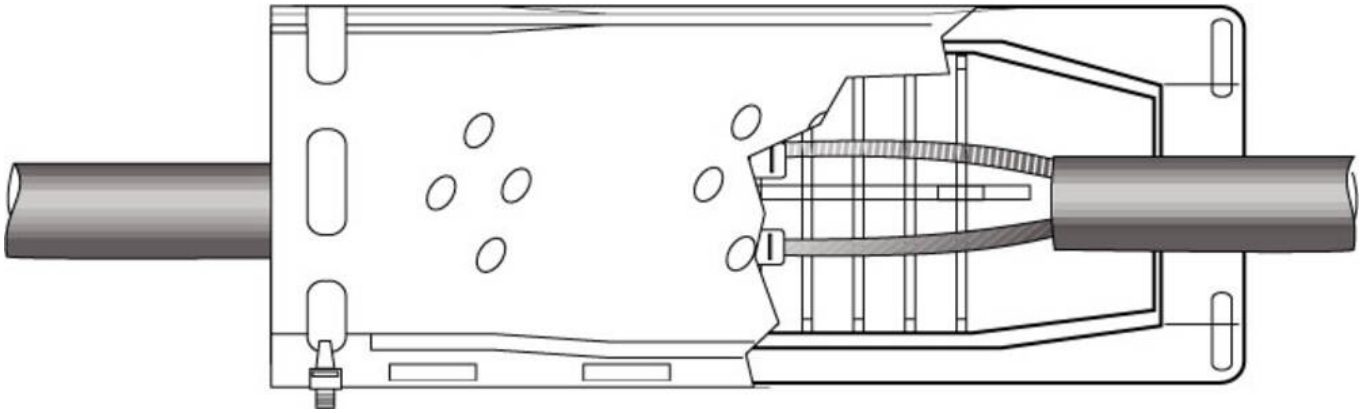

Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice