
BMCG-PVC-S-50-LG

Conduit, galvanized steel, PVC coated, smooth, RAL 7035, NW50





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	galvanized steel
Sheathing material 1st coating	PVC
Surface	smooth
Product Color	RAL 7005
Protection class	IP67
Temp. range min	-15 °C
Temp. range max	80 °C
NW	50
External diameter ED	56 mm
Ø inside	50,5 mm
Bending radius R	200 mm
Type	BMCG-PVC-S-50-LG
WISKA-Order no.	10109038
Packing unit	25 m
EAN number	4007686174830
Tariff number	83071000
ETIM-Classification	EC001179


Recommended accessories

EMBMFS-S-50-50	10109117
EMBMFS-S-50-63	10109119

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

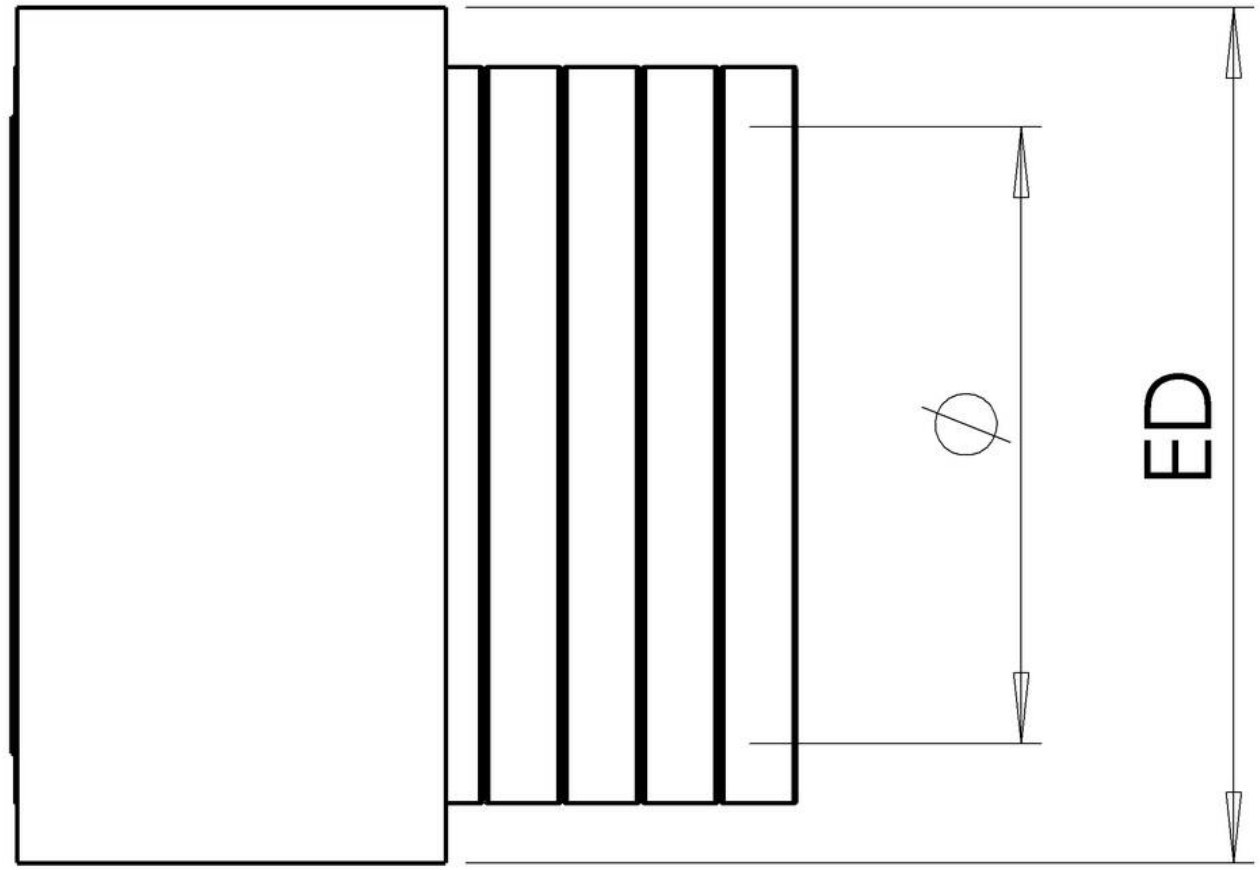

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice