
BMCG-PU-C-50-BK

Conduit, galvanized steel, PU coated, corrugated, RAL 9005, NW50





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

HL3 EN 45545 · BRACE · RoHS

Material	galvanized steel
Sheathing material 1st coating	PU
Surface	corrugated
Product Color	RAL 9005
Protection class	IP67
Temp. range min	-55 °C
Temp. range max	120 °C
NW	50
External diameter ED	56 mm
Ø inside	50,5 mm
Bending radius R	200 mm
Type	BMCG-PU-C-50-BK
WISKA-Order no.	10109062
Packing unit	25 m
EAN number	4007686080155
Tariff number	83071000
ETIM-Classification	EC001179


Recommended accessories

EMBMFS-C-50-50	10109118
EMBMFS-C-50-63	10109120

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

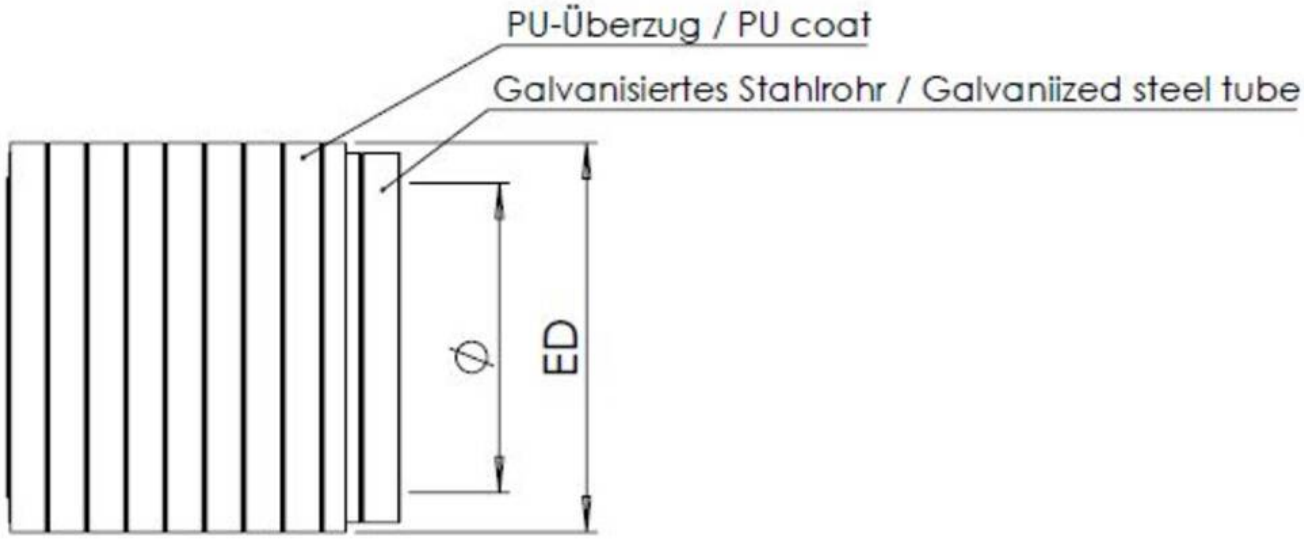

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice