
BMCG-PVC-C-BG-12

Conduit, galvanized steel core PVC coated and steel wire over-braid, NW12







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	galvanized steel
Sheathing material 1st coating	PVC
Surface	corrugated
Protection class	IP67
Temp. range min	-15 °C
Temp. range max	70 °C
NW	12
External diameter ED	17,5 mm
Ø inside	12 mm
Bending radius R	50 mm
Type	BMCG-PVC-C-BG-12
WISKA-Order no.	10109080
Packing unit	30 m
EAN number	4007686080490
Tariff number	83071000
ETIM-Classification	EC001179


Recommended accessories

EMBMFS-S-12-16	10109091
EMBMFS-S-12-20	10109093

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

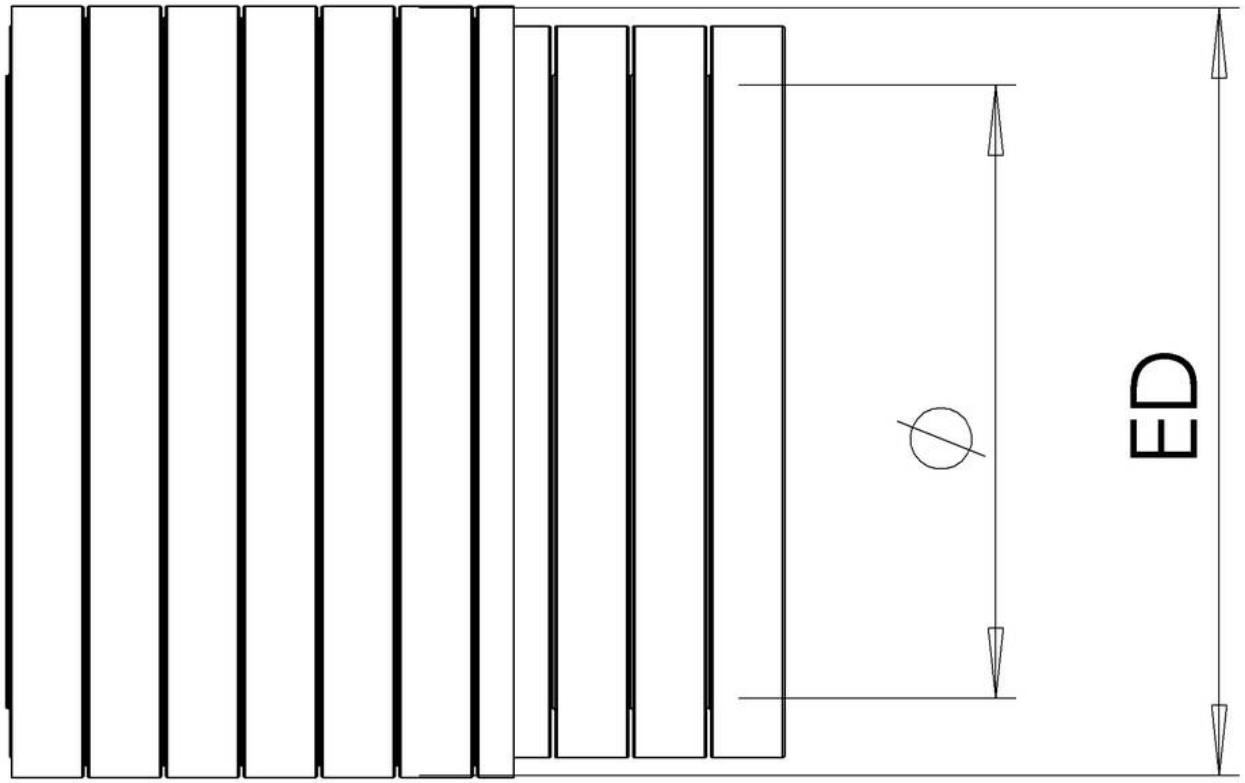

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice