
TKS 32/100

MultiCLIXX® Membrane cable entrie with strain relief





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Polypropylene
Material membrane	TPE
Temp. range min	-30 °C
Temp. range max	80 °C
Glow wire test	960 °C
Protection class	IP66
Ø Connection thread D	32
Ø cable diameter min	4 mm
Ø cable diameter max	12 mm
External diameter ED	37 mm
Total length TL	12 mm
Ø Drilling	32 mm
Wall thickness S	2 mm
Product Color	RAL 9001
Order no. RAL 9001	10111717
Type	TKS 32/100
Packing unit	100
ETIM-Classification	EC000451


Remarks:

- Flammability: UL94-V0
- for cable entries 2 x 7-12mm + 2 x 4-8mm

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

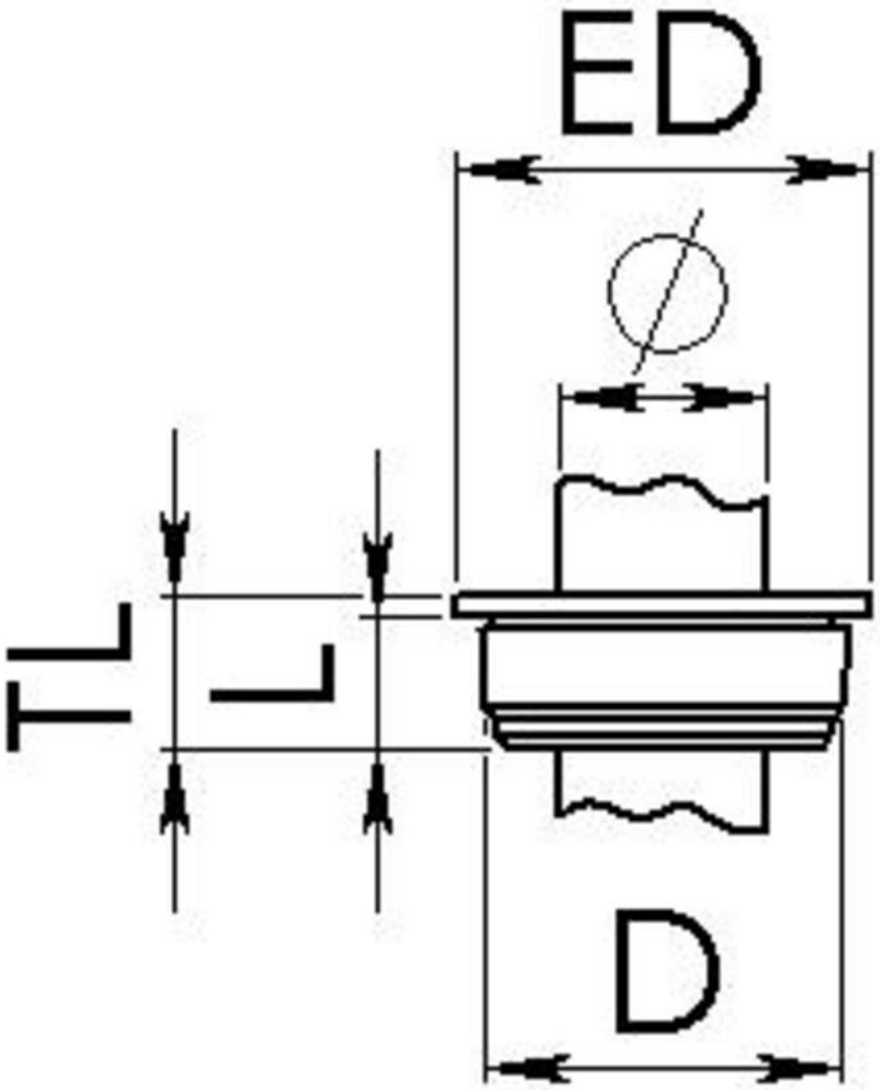

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice