
CUPG-GS04-M20

ShieldGLAND M20





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material sealing gasket	TPE, EPDM
Packing unit	10
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP68 (1,0 bar 30 min)
Thread type	M
Ø Connection thread D	20
Lead	1,5
Length screw-in thread L	13 mm
Ø cable diameter min	12 mm
Ø cable diameter max	21 mm
Ø cable below cable shield max	12 mm - 17 mm
Key width SW	32 mm
Collar diameter (E)	36 mm
Total length TL	57 mm - 61 mm
Type	CUPG-GS04-M20
WISKA-Order no.	10112106
EAN number	4007686292053
Tariff number	74198090

Remarks:


LSF = Low smoke and fume

LSOH = Low smoke zero halogen

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

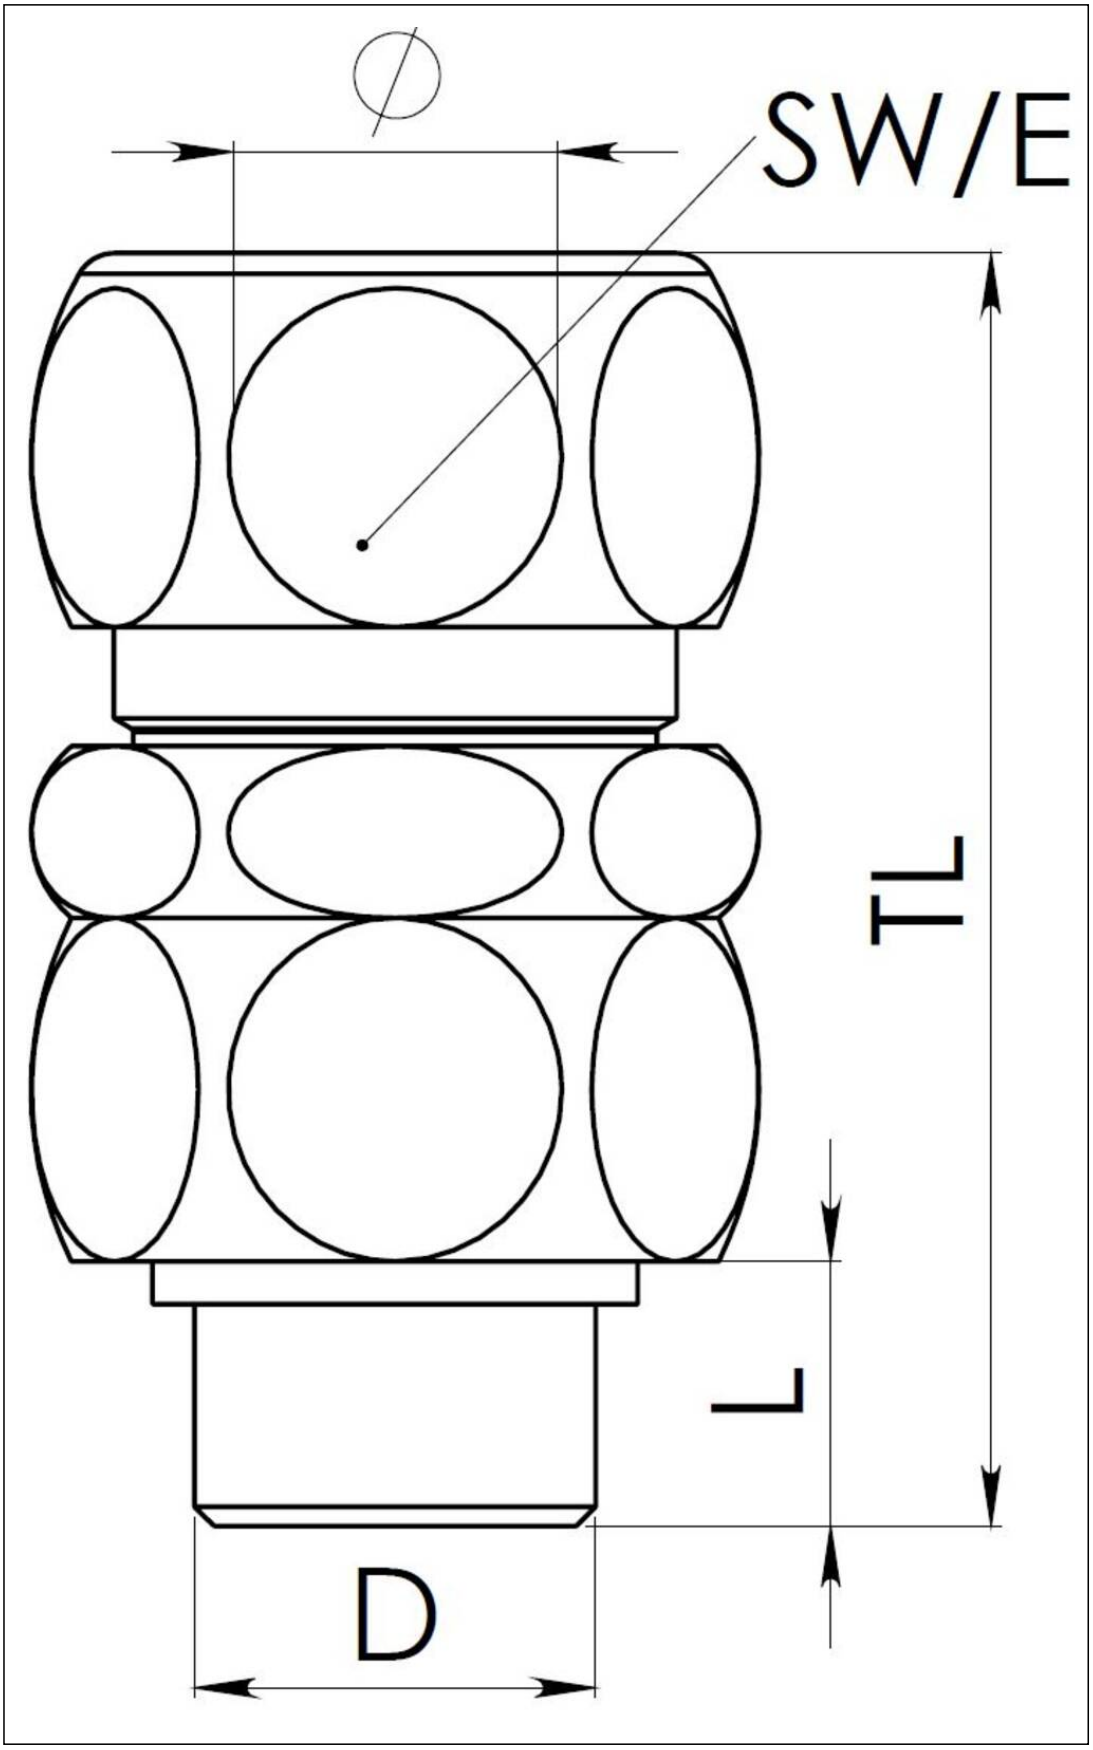

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice