
Product Data Sheet

CH-EX260/4032H/D300AS





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Type	CH-EX260/4032H/D300AS
WISKA-Order no.	10112620
Material	Stainless steel
Surface	Powder coated
Colour	RAL 9016
Operational areas	Explosion protection
Weight	12 kg
Protection class	IP66, IP68 (0,2bar, 30min)
Temp. range min	-30 °C
Temp. range max	55 °C
Humidity	100 %
Wash&Wipe	No
Zone	1
Explosion Groups	IIC
Temp.-class	T6
Type of protection	Ex d
Marking	II 2 D Ex tb IIIC T85°C Db, II 2 G Ex db IIC T6 Gb
Approval	TÜV NORD CERT
Resolution	2560x1440 (4MP)
Image Sensor	1/2.8" Starvis CMOS
Video Standard	Digital
Video Streaming	H.264/H.265/MJPEG
Zoom	Yes
Zoom (opt. x digi.)	512 (opt: 32x digi: 16x)
Frames per Second	30

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

Lighting Conditions	Low light
Min. illumination	0,005 lx / 0,0005 lx (b/w)
Angle of View (horizontal)	55.8° - 2.3°
Angle of View (vertical)	31.9° - 1.3°
Pan/Tilt	Hand operated
P/T-Type	D300AS
Presets P/T	No
Rotation horizontal	360 °
Rotation vertical	+80 ° / -80 °
Mounting	Upside
Vibration (0-100Hz)	1,4 g
Voltage	24 V
Type of Voltage	DC
Wattage	6 W
Junction box required	Yes
CCTV add-on	Back Light Compensation
Tariff number	85255000

Remarks:

CH EX260-U-03-M20-B-5m/D300AS
Ex-Camera Station Outdoor CH-EX260,
flame proof, Zone 1,
IP66/IP68 (0,2bar 30min)
Manual pan&tilt mounting bracket
D300AS,
Camera module:IP/POE
Cable: 5 m MULTI-CAT5GL included
connected to camera.
Camera module: IP/POE,
Resolution: max. 4MP (2560x1440)
Lens: 4.8mm-154mm, autofocus
Zoom: 32x
ATEX:
II 2 G Ex db IIC T6 Gb
II 2 D Ex tb IIIC T85°C Db
IECEx:
Ex d IIC T6 Gb,
Ex tb IIIC T85°C Db
Junction-box: Type 510/11 not included!

Recommended accessories

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk


Other technical data on request / subject to change without notice


510/3/11xRK1,5/3xMMSKE-RDE 24 EMV-Z 10104468

07.11.2026


Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

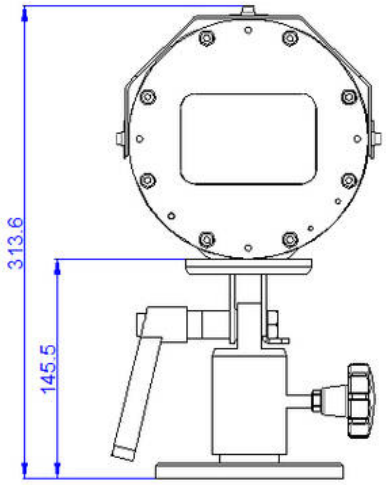

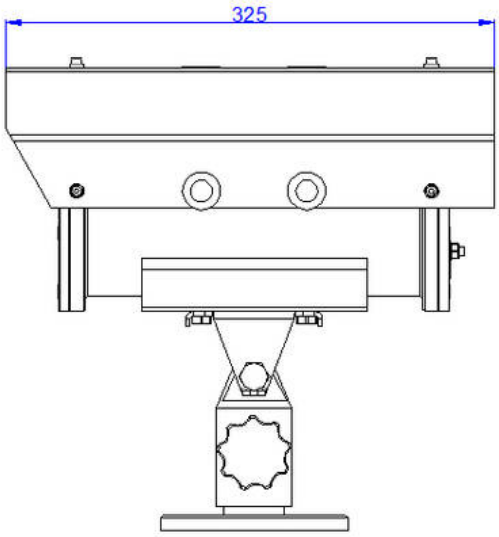

MOUNTING HOLES D300AS



Remarks:
Cables for pan/tilt unit and camera are preinstalled by WISKA

Product data Camera:

Material:	stainless steel
Finish:	Powder coated
Colour:	Traffic white RAL9016
IP:	68 EN60529
Power:	24VAC/ DC / 50-60Hz

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice