
Product Data Sheet

5010-PU-1x220W-230-AA-E01

Ballast Unit for LED Floodlight 5010 1x220W





Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

WISKA-Order no.	10113096
Type	5010-PU-1x220W-230-AA-E01
Material	Stainless steel
Wattage	220 W
Power^	1 x 220 W
Voltage max. (V)	264 V
Type of Voltage	AC / DC
Frequence	50/60 Hz
Protection class	IP66 / IP67
Operational areas	Outdoor
Temp. range min	-30 °C
Temp. range max	55 °C
Mounting	Wall
Lightsource	LED
System Lifetime	100000 h
Type of cable gland	M 25 x 1,5
Material cable gland	Brass nickel-plated
Ø cable diameter min	9 mm
Ø cable diameter max	17 mm
External dimensions LxWxH	440 x 160 x 90 mm
Colour	White
Surface	Powder coated
Weight	5 kg
Tariff number	85041080

Remarks:

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

D4i-certificated ballast unit

The maximum cable length between the ballast unit and the floodlight must not exceed 50 metres.


Spare parts

SP-5010-PU-1x220W-230 Mounting plate	22001429
SP-5010 LED Driver 220W	22001431

08.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

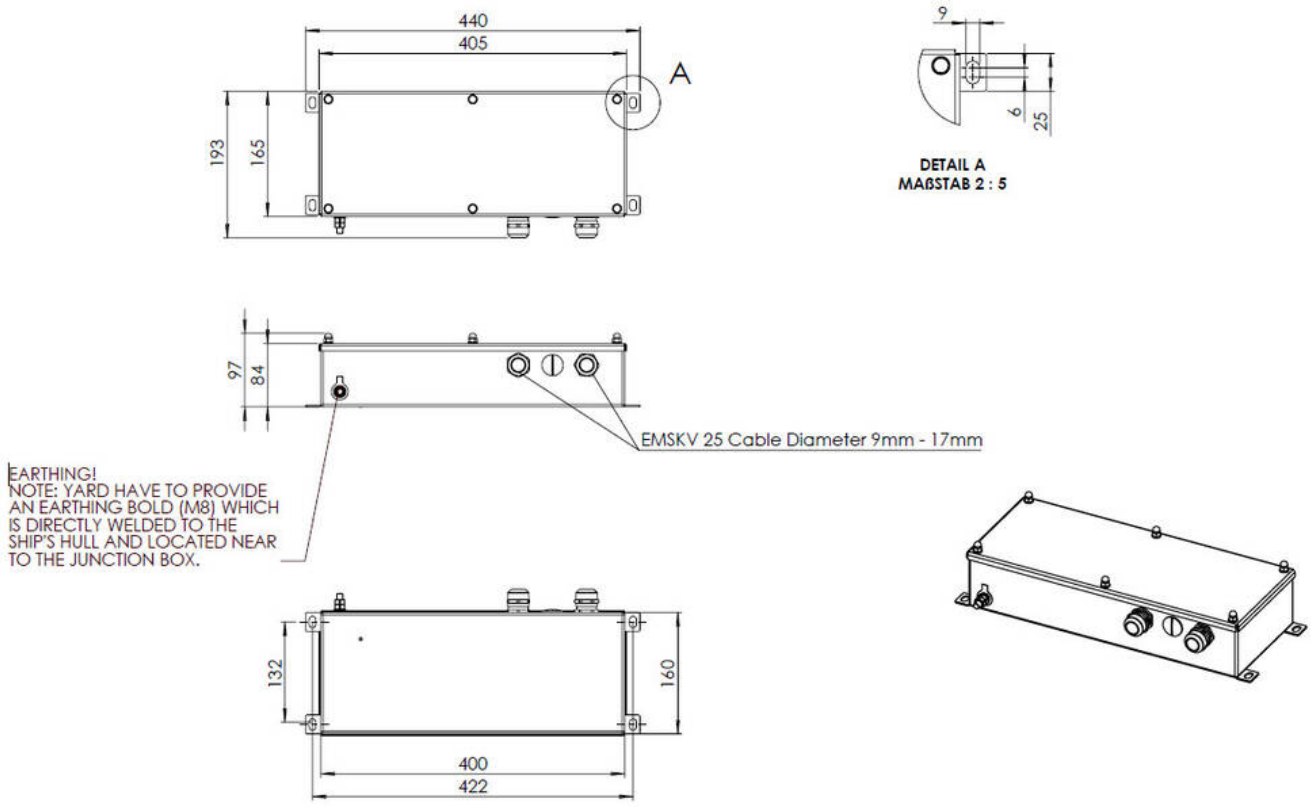

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice