

EMS 40 LG

Membrane-screw







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

RoHS

Material	Polypropylene
Material membrane	TPE
Temp. range min	-30 °C
Temp. range max	80 °C
Glow wire test	650 °C
Protection class	IP66
Thread type	M
Ø Connection thread D	40
Lead	1,5
Length screw-in thread L	8,5 mm
Ø cable diameter min	16 mm
Ø cable diameter max	28 mm
Key width SW	42 mm
Collar diameter (E)	44 mm
Total length TL	15 mm
Installation torques	5 N/m
Product Color	RAL 7035
Order no. RAL 7035	10113527
Type	EMS 40 LG
Packing unit	50
EAN number	4007686317312
Tariff number	39269097
ETIM-Classification	EC000451

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice


Recommended accessories

EMUG 40 LG	10060775
EADR 40	10062806

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

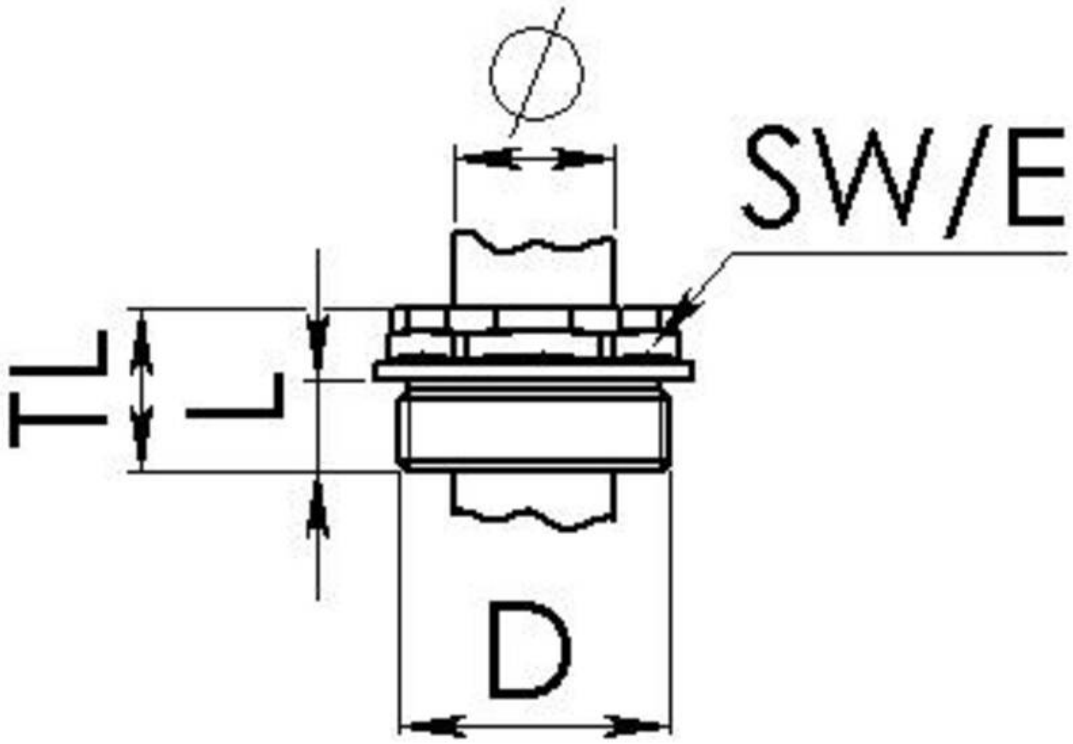

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice