
VMSKV-B 24-07







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material cable gland	Brass lead-free chromium-plat.
Material sealing gasket	EPDM
Material earthing insert	brass lead-free chromium plat.
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP66 / IP68 (5 bar 30 min), IP69
Thread type	M
Ø Connection thread D	24
Lead	1,5
Length screw-in thread L	11 mm
Ø cable diameter min	9 mm
Ø cable diameter max	21 mm
Ø cable below cable shield max	7 mm
Key width SW1	33 mm
Key width SW2	33 mm
Collar diameter E1	36 mm
Collar diameter E2	36 mm
Total length TL	54 mm - 68 mm
Type of cable anchorage	A
Install. torques fitting	20 N/m
Install. torques cap nut	20 N/m
Impact category	6
Surface	Chromium-plated
WISKA-Order no.	10114074
Type	VMSKV-B 24-07

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk


Other technical data on request / subject to change without notice

Packing unit	5
Tariff number	85369010
EAN number	4007686326321
ETIM-Classification	EC000441
VG Registration number	E71E330/26002
VG Labeling	VG88846-4-A003-07-B-LF

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

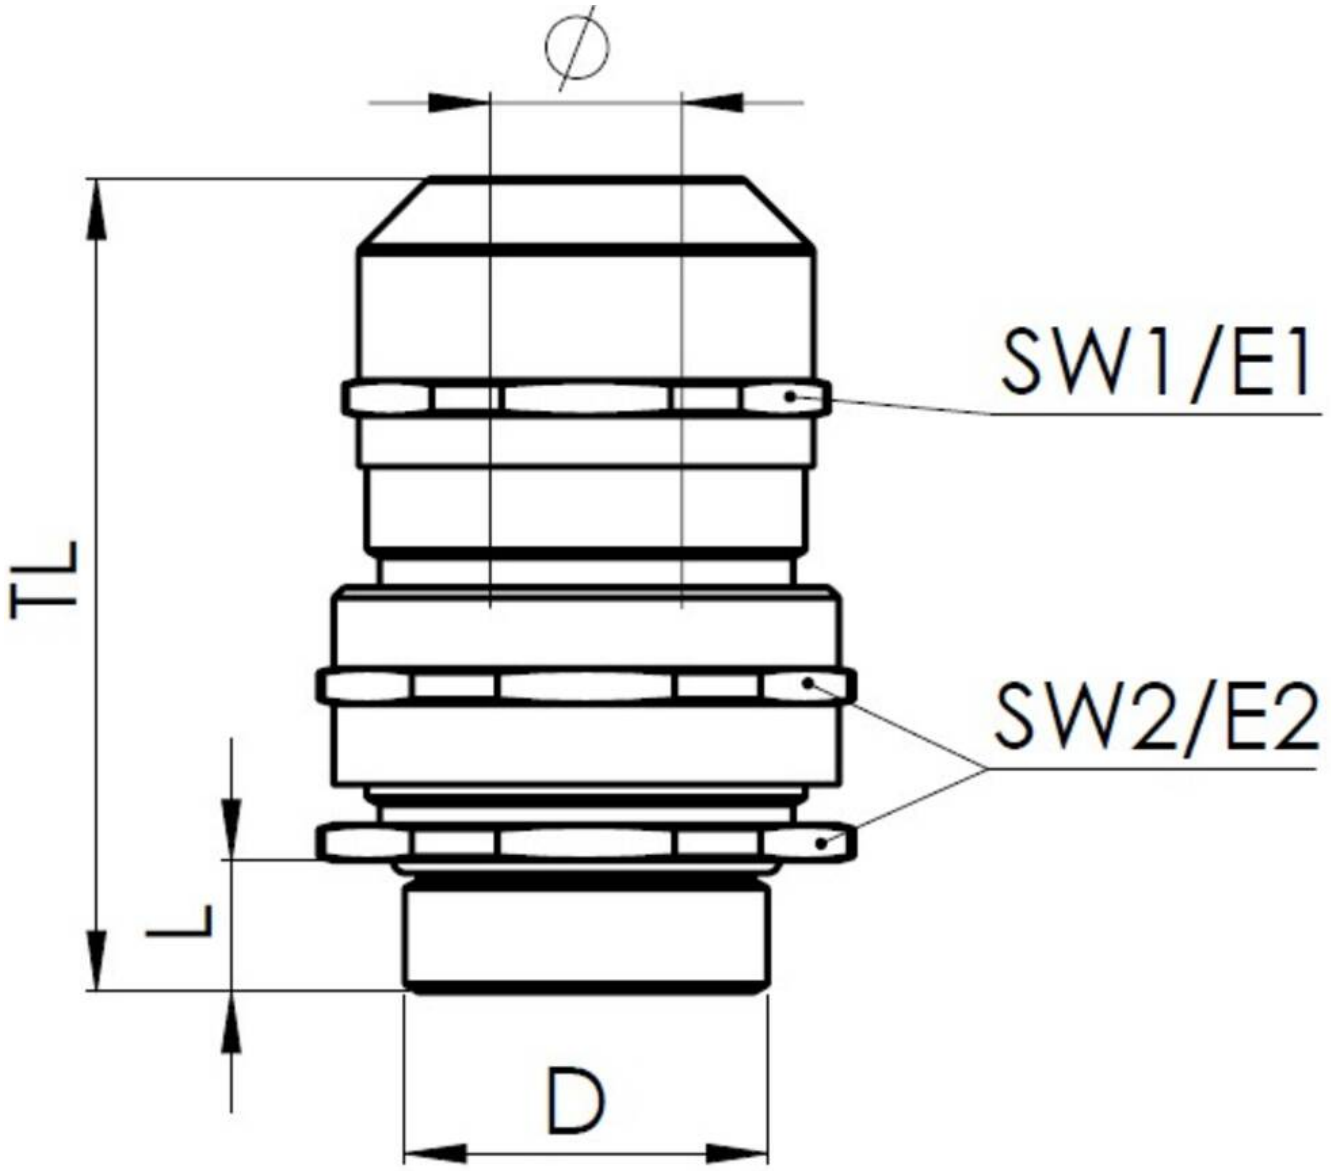

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice