
VMSKV-B 50-30







Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material cable gland	Brass lead-free chromium-plat.
Material sealing gasket	EPDM
Material earthing insert	brass lead-free chromium plat.
Temp. range min	-40 °C
Temp. range max	100 °C
Protection class	IP66 / IP68 (5 bar 30 min), IP69
Thread type	M
Ø Connection thread D	50
Lead	1,5
Length screw-in thread L	15 mm
Ø cable diameter min	28 mm
Ø cable diameter max	48 mm
Ø cable below cable shield max	30 mm
Key width SW1	68 mm
Key width SW2	68 mm
Collar diameter E1	73 mm
Collar diameter E2	73 mm
Total length TL	78,5 mm - 97,5 mm
Type of cable anchorage	A
Install. torques fitting	40 N/m
Install. torques cap nut	40 N/m
Impact category	6
Surface	Chromium-plated
WISKA-Order no.	10114101
Type	VMSKV-B 50-30

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk


Other technical data on request / subject to change without notice

Packing unit	1
Tariff number	85369010
EAN number	4007686326871
ETIM-Classification	EC000441
VG Registration number	E71E330/26002
VG Labeling	VG88846-4-A016-30-B-LF

06.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

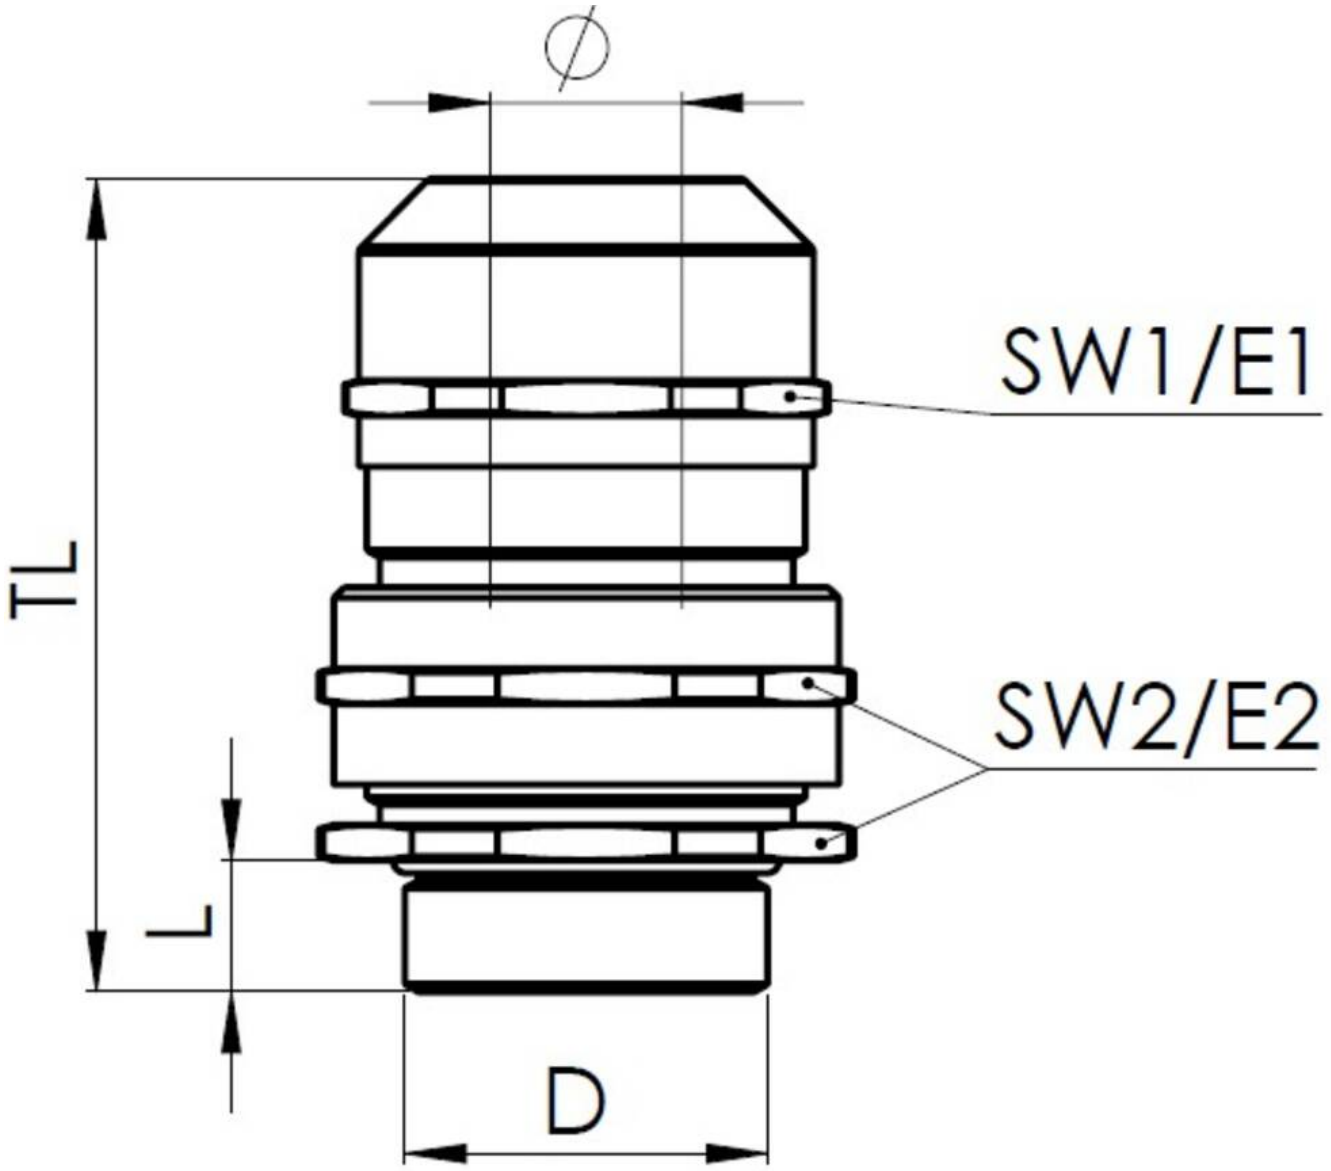

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice