
# SO-16A-FS-110V-3P-4H-IP67-K01-C01-A02

CEE Wall mounted receptacle switched, 16A 110V 4h, plastic, IP67



| Zeichnung 1 MB 714 | Amp. | 16 | | | 32 | | |
|---|---|---|---|---|---|---|---|
| | Pole | 3 | 4 | 5 | 3 | 4 | 5 |
| Maße in mm | a | 225 | 225 | 225 | 225 | 225 | 225 |
| | b | 118 | 118 | 118 | 118 | 118 | 118 |
| | c | 163 | 163 | 165 | 168 | 168 | 169 |
| | d | 208 | 208 | 208 | 208 | 208 | 208 |
| | e | 101 | 101 | 101 | 101 | 101 | 101 |
| | f | 6,4 | 6,4 | 6,4 | 6,4 | 6,4 | 6,4 |
| | g | 5 | 5 | 5 | 5 | 5 | 5 |
| | h | 241 | 245 | 249 | 252 | 252 | 255 |
| | α | 25 | | | 25 | | |
| | M | 1x25 und 1x32 | | | 1x25 und 1x32 | | |
| | M* | 2x25 | 2x25 | 2x25 | 2x25 | 2x25 | 2x25 |
| Leitung bis mm Ø | | 25 | 25 | 25 | 25 | 25 | 25 |
| Klemmen für Leiterquerschnitt von bis mm² | | 2,5 —10 | 2,5 —10 | 2,5 —10 | 2,5 —10 | 2,5 —10 | 2,5 —10 |

Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

| | |
|---|---|
| **WISKA-Order no.** | 50104752 |
| **Type** | SO-16A-FS-110V-3P-4H-IP67-K01-C01-A02 |
| **Material** | Plastic |
| **Current** | 16 A |
| **Voltage max. (V)** | 110 V |
| **Protection class** | IP67 |
| **Number of sockets** | 1 |
| **Temp. range min** | -25 °C |
| **Temp. range max** | 45 °C |
| **Clock face position** | 4h |
| **Socket insert** | 2 - poles + PE |
| **Mounting** | Surface mounting |
| **Weight** | 1,15 kg |
| **Variations** | on request |
| **Tariff number** | 85366990 |

Remarks:

Contact: X-CONTACT
Connection technology: Screw terminals

- can be switched off
- with DUO-mechanical interlock
- made of plastic
- receptacles can be padlocked
- without cable glands

Pre-stamping for cable entry

Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice


**1x M25, 1x M32**

07.11.2026

Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice

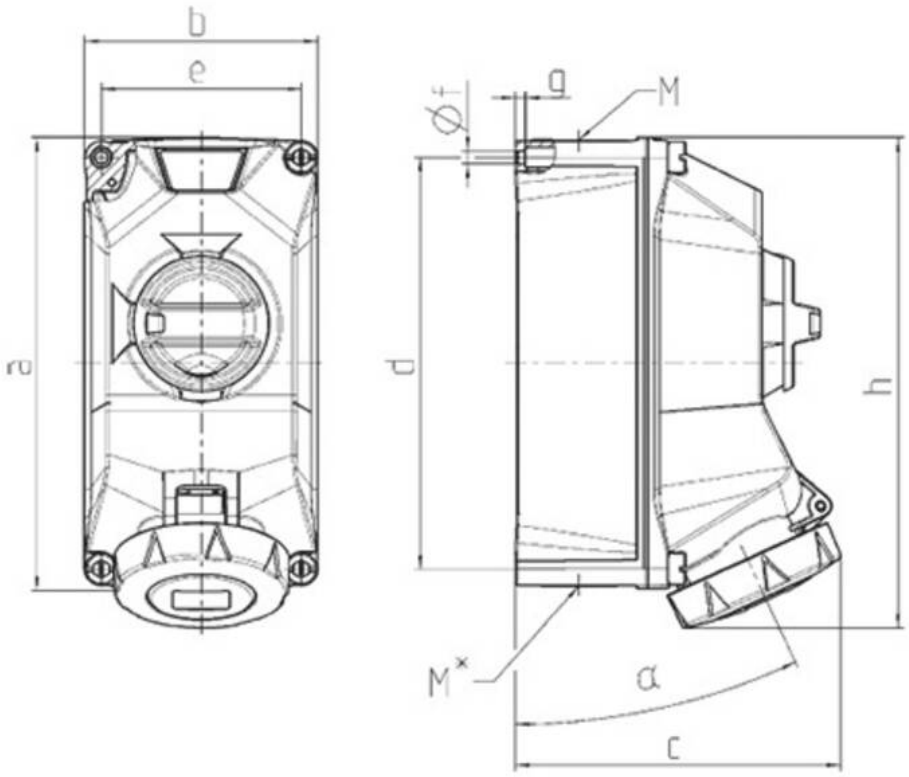


| Zeichnung | Amp. | 16 | | | 32 | | |
|---|---|---|---|---|---|---|---|
| 1 MB 714 | Pole | 3 | 4 | 5 | 3 | 4 | 5 |
| Maße in mm | a | 225 | 225 | 225 | 225 | 225 | 225 |
| | b | 118 | 118 | 118 | 118 | 118 | 118 |
| | c | 163 | 163 | 165 | 168 | 168 | 169 |
| | d | 208 | 208 | 208 | 208 | 208 | 208 |
| | e | 101 | 101 | 101 | 101 | 101 | 101 |
| | f | 6,4 | 6,4 | 6,4 | 6,4 | 6,4 | 6,4 |
| | g | 5 | 5 | 5 | 5 | 5 | 5 |
| | h | 241 | 245 | 249 | 252 | 252 | 255 |
| | α | 25 | | | 25 | | |
| | M | 1x25 und 1x32 | | | 1x25 und 1x32 | | |
| | M* | 2x25 | 2x25 | 2x25 | 2x25 | 2x25 | 2x25 |
| Leitung bis mm Ø | | 25 | 25 | 25 | 25 | 25 | 25 |
| Klemmen für Leiterquer- | | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 | 2,5 |
| schnitt von bis mm² | | —10 | —10 | —10 | —10 | —10 | —10 |

Your Contact:
**WISKA UK Ltd.**
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk



Other technical data on request / subject to change without notice