
CWA 20SS

CWA Pack, ECWAL, aluminium gland and locknut, shroud LSF






Products may differ in size, colour and appearance to those shown. If you require further information or customisation, please contact us directly.

Material	Aluminium
Material shrouds	LSF PVC
Packing unit	2
Temp. range min	-20 °C
Temp. range max	80 °C
Protection class	IP66
Thread type	M
Ø Connection thread D	20
Lead	1,5
Length screw-in thread L	10 mm
Ø cable diameter min	8,4 mm
Ø cable diameter max	13,8 mm
Ø cable below cable shield max	-9 mm
Key width SW	22 mm
Collar diameter (E)	25 mm
Total length TL	48 mm
Type	CWA 20SS
WISKA-Order no.	50108822

07.11.2026

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice

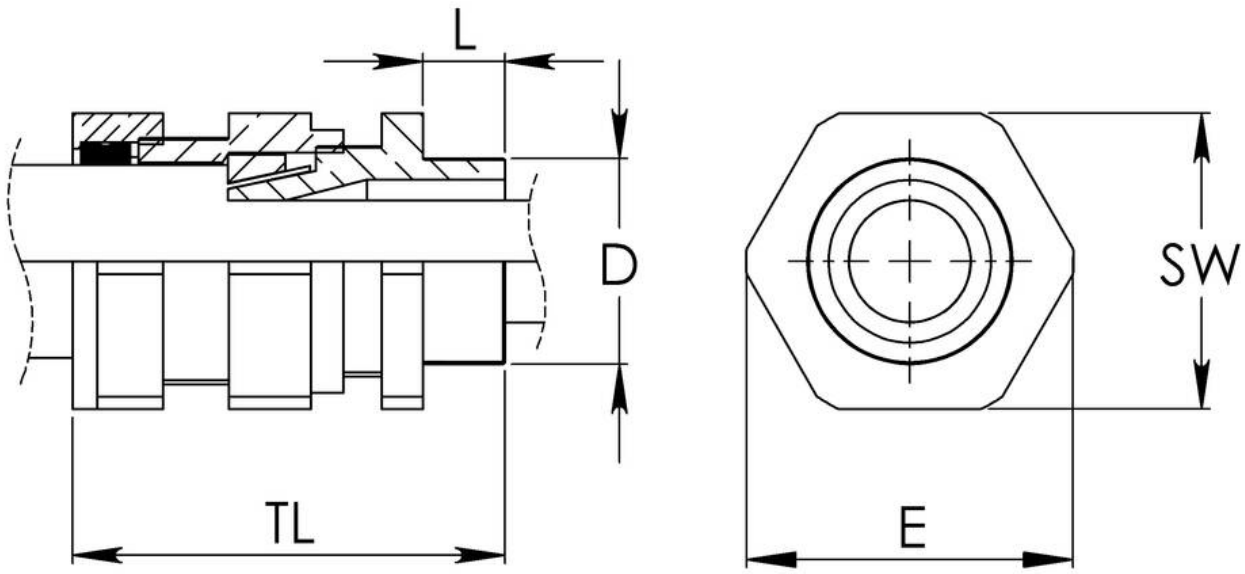

Your Contact:
WISKA UK Ltd.
Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain
☎ +44-12-08816062 · 🖷 +44-12-08816708
info@wiska.co.uk · www.wiska.co.uk

Other technical data on request / subject to change without notice