


ESKV-L 12

Cable gland, polyamide with long thread



Product illustrations are exemplary and may differ from the chosen product. Further variants and individual customization, we will gladly provide you on request.

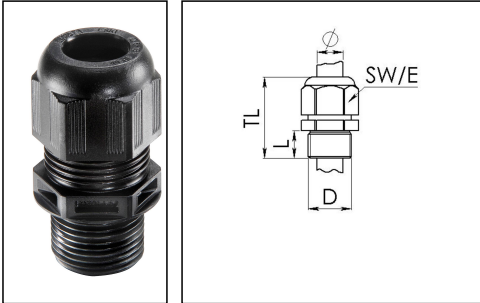

| | |
|--------------------------|---------------------------|
| Material cable gland | Polyamide |
| Material sealing gasket | EPDM |
| Protection class | IP69, IP68 (5 bar 30 min) |
| Temp. range min | -40 °C |
| Temp. range max | 100 °C |
| Glow wire test | 750 °C |
| Thread type | M |
| Ø Connection thread D | 12 |
| Lead | 1,5 |
| Length screw-in thread L | 15 mm |
| Ø cable diameter min | 3 mm |
| Ø cable diameter max | 7 mm |
| Ø cable diameter UL | 4,1 mm - 6 mm |
| Key width SW | 16 mm |
| Collar diameter (E) | 18 mm |
| Total length TL | 35 mm - 40 mm |
| Type of cable anchorage | A |
| Install. torques fitting | 2 N/m |
| Install. torques cap nut | 2 N/m |
| Impact category | 2 |
| Type | ESKV-L 12 |
| Product Color | RAL 9005 |
| Order no. RAL 9005 | 10066500 |
| Packing unit | 50 |
| ETIM-Classification | EC000441 |

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

Recommended accessories



| | |
|----------------------|----------|
| EMUG 12 | 10061780 |
| RDE 12 | 10062183 |
| EADR 12 | 10062801 |
| BS 7 | 10064005 |
| MFD 12/04/020 | 10064392 |
| MFD 12/02/020 | 10100525 |

17.01.2019


Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

 +44-12-08816062 ·  +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk

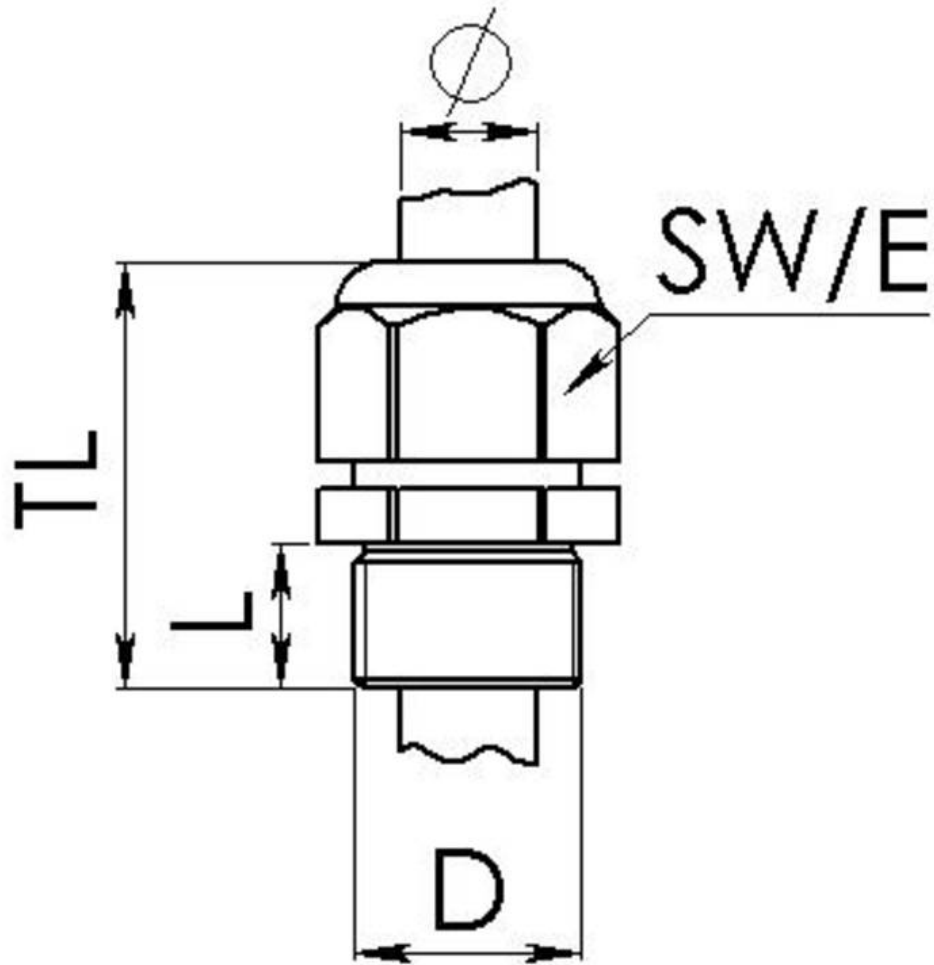

Your Contact:

WISKA UK Ltd.

Unit 7, Hurling Way · St. Columb Major Business Park · TR9 6SX, St. Columb Major, Cornwall · Great Britain

☎ +44-12-08816062 · 📠 +44-12-08816708

info@wiska.co.uk · www.wiska.co.uk